




WE ADD MOVEMENT
TO YOUR POWER



CATALOG
2024



TRİGER KASNAKLAR
TIMING BELT PULLEYS




MOTOR GÜCÜ KW

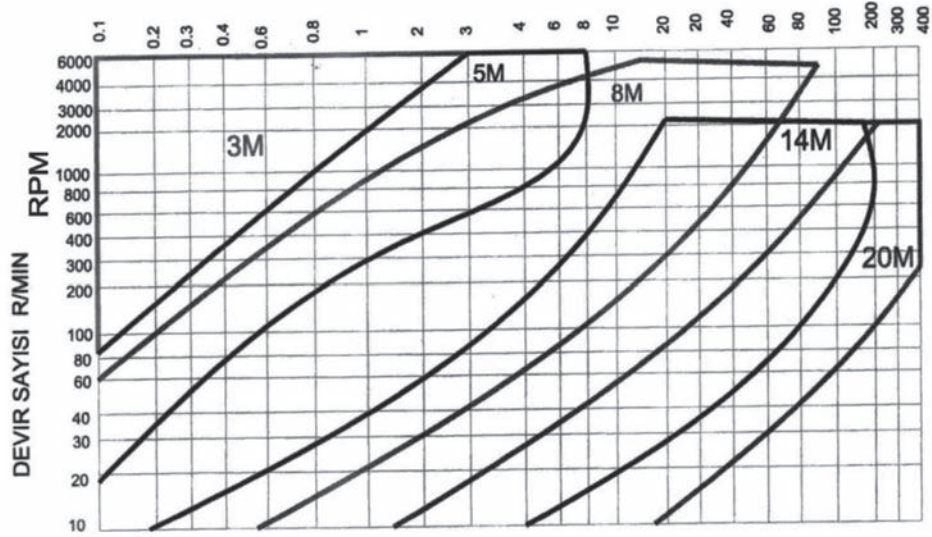

HTD TRİGER KASNAK PROFİLLERİ

HTD Profile Timing Belt Pulleys

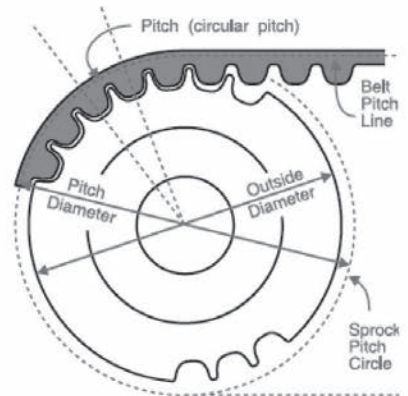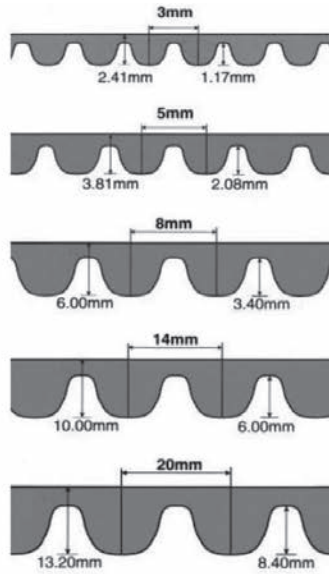


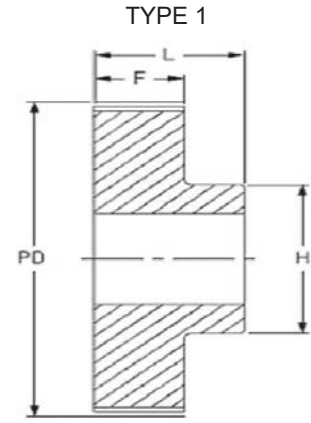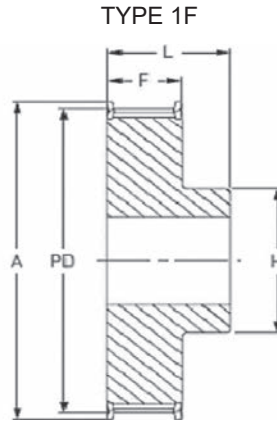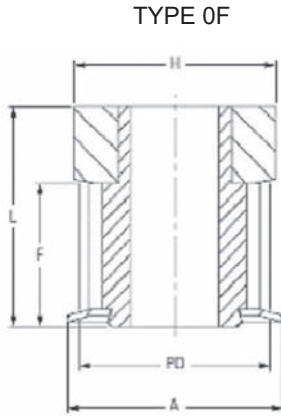


PİLOT DELİKLİ / PILOT BORE

3M 09			Kayış Geniřlięi 0,9 mm Belt Width 0,9 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	9.55	13	0F	-	3	13	14.5	17.5
12	11.46	15	0F	-	5	15	14.5	17.5
14	13.37	16	0F	-	6	16	14.5	17.5
15	14.32	17.5	0F	-	6	17.5	14.5	17.5
16	15.28	18	1F	4	7	10	14.5	20.6
18	17.19	19.5	1F	6	8	11	14.5	20.6
20	19.1	23	1F	6	9	13	14.5	20.6
21	20.05	25	1F	6	9	14	14.5	20.6
22	21.01	25	1F	6	9	14	14.5	20.6
24	22.92	25	1F	6	9	14	14.5	20.6
26	24.83	28	1F	6	11	16	14.5	20.6
28	26.74	32	1F	6	12	18	14.5	20.6
30	28.65	32	1F	6	14	20	14.5	20.6
32	30.56	36	1F	6	15	22	14.5	20.6
36	34.38	38	1F	6	16	26	14.5	22.2
40	38.2	42	1F	6	18	28	14.5	22.2
44	42.02	48	1F	6	20	33	14.5	22.2
48	45.84	-	1	8	20	33	14.5	22.2
60	57.3	-	1	8	20	33	14.5	22.2
72	68.75	-	1	8	20	33	14.5	22.2


TYPE 0F



TYPE 1F

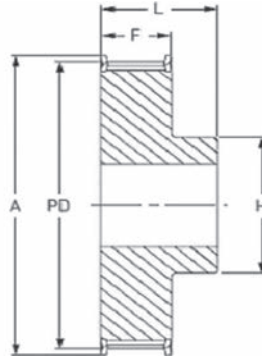


TYPE 1

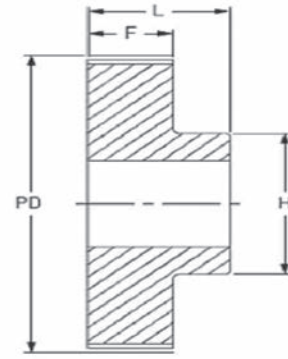


PİLOT DELİKLİ / PILOT BORE

3M15			Kayış Geniřlięi 15 mm Belt Width 15 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	9.55	13	0F	-	3	13	20.5	26
12	11.46	15	0F	-	5	15	20.5	26
14	13.37	16	0F	-	6	16	20.5	26
15	14.32	17.5	0F	-	6	17.5	20.5	26
16	15.28	18	1F	4	7	10	20.5	26
18	17.19	19.5	1F	6	8	11	20.5	26
20	19.1	23	1F	6	9	13	20.5	26
21	20.05	25	1F	6	9	14	20.5	26
22	21.01	25	1F	6	9	14	20.5	26
24	22.92	25	1F	6	9	14	20.5	26
26	24.83	28	1F	6	11	16	20.5	26
28	26.74	32	1F	6	12	18	20.5	26
30	28.65	32	1F	6	14	20	20.5	26
32	30.56	36	1F	6	15	22	20.5	26
36	34.38	38	1F	6	16	26	20.5	30
40	38.2	42	1F	6	18	28	20.5	30
44	42.02	48	1F	6	20	33	20.5	30
48	45.84	-	1	8	20	33	20.5	30
60	57.3	-	1	8	20	33	20.5	30
72	68.75	-	1	8	20	33	20.5	30

TYPE 1F




TYPE 2



PİLOT DELİKLİ / PILOT BORE


5M09				Kayış Geniřlięi 0.9 mm Belt Width 0.9 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
12	19.1	25	1F	4	7	13	14.5	20
14	22.28	25	1F	6	8	14	14.5	20
15	23.87	28	1F	6	10	16	14.5	20
16	25.46	28	1F	6	10	16.5	14.5	20
18	28.65	32	1F	6	12	20	14.5	20
20	31.83	36	1F	6	14	23	14.5	22.5
21	33.42	38	1F	6	14	24	14.5	22.5
22	35.01	38	1F	6	14	25.5	14.5	22.5
24	38.2	42	1F	6	16	27	14.5	22.5
26	41.38	44	1F	6	18	30	14.5	22.5
28	44.56	48	1F	6	18	30.5	14.5	22.5
30	47.75	51	1F	6	20	35	14.5	22.5
32	50.93	54	1F	8	22	38	14.5	22.5
36	57.3	60	1F	8	22	38	14.5	22.5
40	63.66	71	1F	8	22	38	14.5	22.5
44	70.03	-	2	8	22	38	14.5	25.5
48	76.39	-	2	8	25	45	14.5	25.5
60	95.49	-	2	8	25	45	14.5	25.5
72	114.59	-	2	8	25	45	14.5	25.5

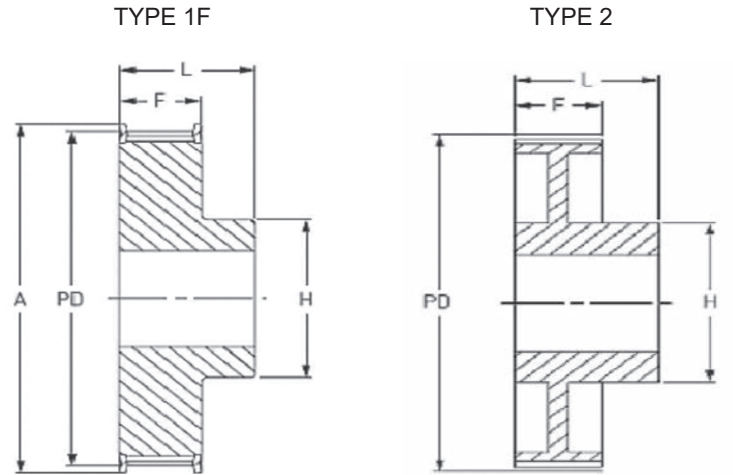


PİLOT DELİKLİ / PILOT BORE

5M15				Kayış Geniřlięi 15 mm Belt Width 15 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
12	19.1	25	1F	4	7	13	20.5	26
14	22.28	25	1F	6	8	14	20.5	26
15	23.87	28	1F	6	10	16	20.5	26
16	25.46	28	1F	6	10	16.5	20.5	26
18	28.65	32	1F	6	12	20	20.5	26
20	31.83	36	1F	6	14	23	20.5	26
21	33.42	38	1F	6	14	24	20.5	26
22	35.01	38	1F	6	14	25.5	20.5	26
24	38.2	42	1F	6	16	27	20.5	28
26	41.38	44	1F	6	18	30	20.5	28
28	44.56	48	1F	6	18	30.5	20.5	28
30	47.75	51	1F	6	20	35	20.5	28
32	50.93	54	1F	8	22	38	20.5	28
36	57.3	60	1F	8	22	38	20.5	28
40	63.66	71	1F	8	22	38	20.5	28
44	70.03	-	2	8	22	38	20.5	30
48	76.39	-	2	8	25	38	20.5	30
60	95.49	-	2	8	25	50	20.5	30
72	114.59	-	2	8	25	50	20.5	30

TYPE 1F

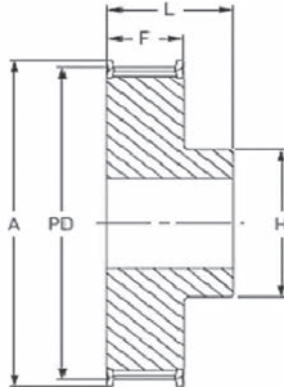


TYPE 2

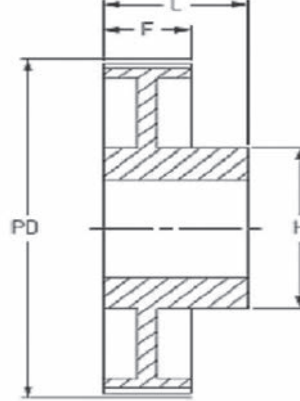


PİLOT DELİKLİ / PILOT BORE

5M25				Kayış Geniřlięi 25 mm Belt Width 25 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
12	19.1	25	1F	4	7	13	30	36
14	22.28	25	1F	6	8	13	30	36
15	23.87	28	1F	6	10	16	30	36
16	25.46	28	1F	6	10	16	30	36
18	28.65	32	1F	6	12	19	30	36
20	31.83	36	1F	6	14	23	30	36
21	33.42	38	1F	6	14	24	30	38
22	35.01	38	1F	6	14	25.5	30	38
24	38.2	42	1F	6	16	27	30	38
26	41.38	44	1F	6	18	30	30	38
28	44.56	48	1F	6	18	30.5	30	38
30	47.75	51	1F	6	20	35	30	38
32	50.93	54	1F	8	22	38	30	38
36	57.3	60	1F	8	22	38	30	38
40	63.66	71	1F	8	22	38	30	38
44	70.03	-	2	8	22	38	30	40
48	76.39	-	2	8	25	38	30	40
60	95.49	-	2	8	25	50	30	40
72	114.59	-	2	8	25	50	30	40
80	127.32	-	2	8	25	92	30	40

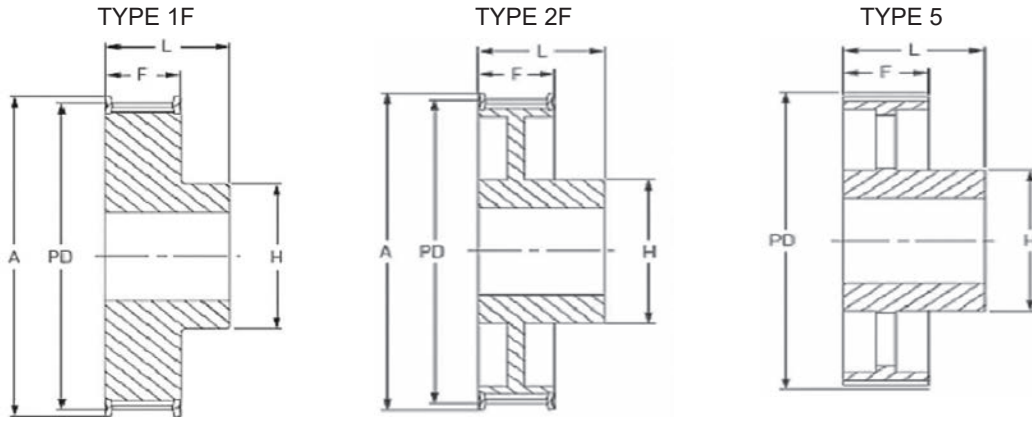


PİLOT DELİKLİ / PILOT BORE

8M20			Kayış Geniřlięi 20 mm Belt Width 20 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
20	50.93	60	1F	12	30	38	28	38
21	53.47	62	1F	12	30	40	28	38
22	56.02	65	1F	12	30	43	28	38
23	58.57	65	1F	12	30	45	28	38
24	61.12	70	1F	12	30	45	28	38
25	63.66	71	1F	12	35	45	28	38
26	66.21	75	1F	12	35	50	28	38
27	68.75	75	1F	12	35	50	28	38
28	71.3	80	1F	15	35	50	28	38
29	73.85	85	1F	15	35	55	28	38
30	76.39	85	1F	15	35	55	28	38
31	78.94	87	1F	15	40	55	28	38
32	81.49	90	1F	15	40	60	28	38
33	84.03	90	1F	15	45	60	28	38
34	86.58	95	1F	15	45	70	28	38
35	89.13	95	1F	15	45	70	28	38
36	91.67	100	1F	15	45	70	28	38
38	96.77	105	1F	15	45	75	28	38
40	101.86	110	1F	15	45	75	28	38
42	106.95	111	1F	15	45	75	28	38
44	112.05	121	1F	15	45	75	28	38
45	114.59	121	1F	15	45	75	28	38
48	122.23	131	1F	15	45	75	28	38
50	127.32	131	1F	15	45	75	28	38
52	132.42	140	1F	15	45	80	28	38
56	142.6	151	2F	15	45	80	28	38
64	162.97	172	2F	15	45	80	28	38
72	183.35	192	2F	15	45	80	28	38
80	203.72	-	5	15	50	80	28	38
90	229.18	-	5	15	50	90	28	38
112	285.21	-	5	18	50	90	28	38
144	366.69	-	5	20	50	90	28	38
168	427.81	-	5	20	55	100	28	38
192	488.92	-	5	20	55	100	28	38

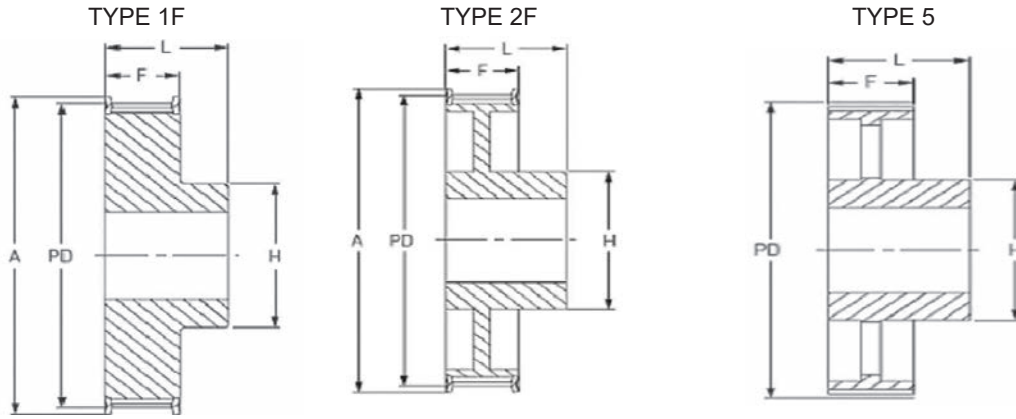




PİLOT DELİKLİ / PILOT BORE

8M30				Kayış Geniřlięi 30 mm Belt Width 30 mm				
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
20	50.93	60	1F	12	30	38	38	48
21	53.47	62	1F	12	30	40	38	48
22	56.02	65	1F	12	30	43	38	48
23	58.57	65	1F	12	30	45	38	48
24	61.12	70	1F	12	30	45	38	48
25	63.66	71	1F	12	35	45	38	48
26	66.21	75	1F	12	35	50	38	48
27	68.75	75	1F	12	35	50	38	48
28	71.3	80	1F	15	35	50	38	48
29	73.85	85	1F	15	35	55	38	48
30	76.39	85	1F	15	35	55	38	48
31	78.94	87	1F	15	40	55	38	48
32	81.49	90	1F	15	40	60	38	48
33	84.03	90	1F	15	45	60	38	48
34	86.58	95	1F	15	45	70	38	48
35	89.13	95	1F	15	45	70	38	48
36	91.67	100	1F	15	45	70	38	48
38	96.77	105	1F	15	45	75	38	48
40	101.86	110	1F	15	45	75	38	48
42	106.95	111	1F	15	45	75	38	48
44	112.05	121	1F	15	45	75	38	48
45	114.59	121	1F	15	45	75	38	48
48	122.23	131	1F	15	45	75	38	48
50	127.32	131	1F	15	45	90	38	48
52	132.42	140	1F	15	45	90	38	48
56	142.6	151	2F	15	50	90	38	48
64	162.97	172	2F	15	50	90	38	48
72	183.35	192	2F	15	50	95	38	48
80	203.72	-	5	15	55	100	38	48
90	229.18	-	5	15	55	100	38	48
112	285.21	-	5	18	55	100	38	48
144	366.69	-	5	20	55	100	38	48
168	427.81	-	5	20	55	100	38	48
192	488.92	-	5	20	55	100	38	48

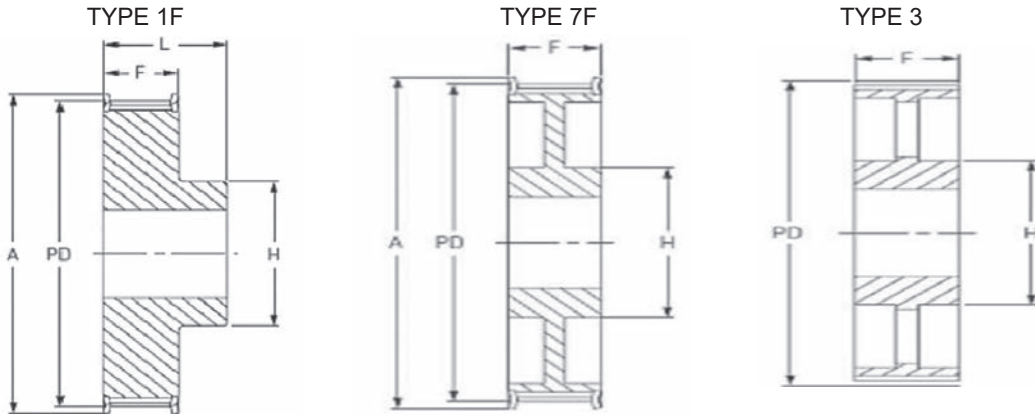


PİLOT DELİKLİ / PILOT BORE

8M50			Kayış Geniřlięi 50 mm Belt Width 50 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
22	56.02	65	1F	12	30	43	60	70
23	58.57	65	1F	12	30	45	60	70
24	61.12	70	1F	12	30	45	60	70
25	63.66	71	1F	12	35	45	60	70
26	66.21	75	1F	12	35	50	60	70
27	68.75	75	1F	12	35	50	60	70
28	71.3	80	1F	15	35	50	60	70
29	73.85	85	1F	15	35	55	60	70
30	76.39	85	1F	15	35	55	60	70
31	78.94	87	1F	15	40	55	60	70
32	81.49	90	1F	15	40	60	60	70
33	84.03	90	1F	15	45	60	60	70
34	86.58	95	1F	15	45	70	60	70
35	89.13	95	1F	15	45	70	60	70
36	91.67	100	1F	15	45	70	60	70
38	96.77	105	1F	15	45	75	60	70
40	101.86	110	1F	18	45	75	60	70
42	106.95	111	1F	18	45	75	60	70
44	112.05	121	1F	18	45	75	60	70
45	114.59	121	1F	18	45	75	60	70
48	122.23	131	1F	18	45	80	60	70
50	127.32	131	7F	18	45	80	60	60
52	132.42	140	7F	18	45	80	60	60
56	142.6	151	7F	18	50	90	60	60
64	162.97	172	7F	18	55	100	60	60
72	183.35	192	7F	18	55	100	60	60
80	203.72	-	3	18	60	110	60	60
90	229.18	-	3	18	60	110	60	60
112	285.21	-	3	18	60	110	60	60
144	366.69	-	3	20	60	110	60	60
168	427.81	-	3	20	65	120	60	60
192	488.92	-	3	20	70	130	60	60

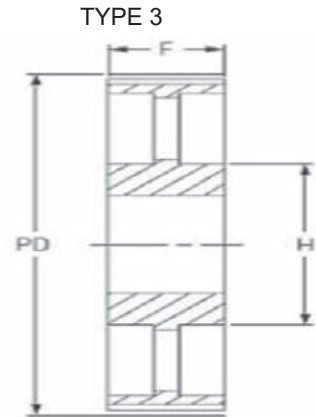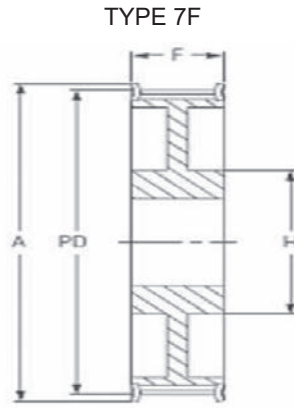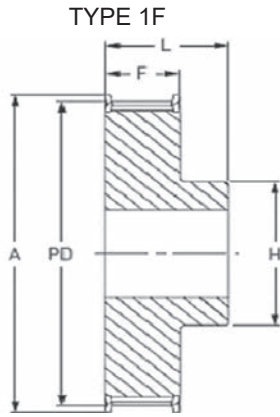


PILOT DELİKLİ / PILOT BORE

8M85			Kayış Geniřlięi 85 mm Belt Width 85 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
22	56.02	65	1F	12	30	43	95	105
23	58.57	65	1F	12	30	45	95	105
24	61.12	70	1F	12	30	45	95	105
25	63.66	71	1F	12	35	45	95	105
26	66.21	75	1F	12	35	50	95	105
27	68.75	75	1F	15	35	50	95	105
28	71.3	80	1F	15	35	50	95	105
29	73.85	85	1F	15	35	55	95	105
30	76.39	85	1F	15	35	55	95	105
31	78.94	87	1F	15	40	55	95	105
32	81.49	90	1F	15	40	60	95	105
33	84.03	90	1F	15	45	60	95	105
34	86.58	95	1F	15	45	70	95	105
35	89.13	95	1F	15	45	70	95	105
36	91.67	100	1F	15	45	70	95	105
38	96.77	105	1F	18	45	75	95	105
40	101.86	110	1F	18	45	75	95	105
42	106.95	111	1F	18	45	75	95	105
44	112.05	121	1F	18	45	75	95	105
45	114.59	121	1F	18	45	75	95	105
48	122.23	131	1F	18	45	80	95	105
50	127.32	131	1F	18	45	80	95	105
52	132.42	140	1F	18	45	80	95	105
56	142.6	151	1F	20	50	90	95	105
60	152.79	158	1F	20	55	100	95	105
64	162.97	172	7F	20	55	100	95	95
72	183.35	192	7F	20	60	110	95	95
80	203.72	-	3	20	60	110	95	95
90	229.18	-	3	20	60	110	95	95
112	285.21	-	3	24	60	110	95	95
144	366.69	-	3	24	65	120	95	95
168	427.81	-	3	24	65	120	95	95
192	488.92	-	3	24	70	130	95	95

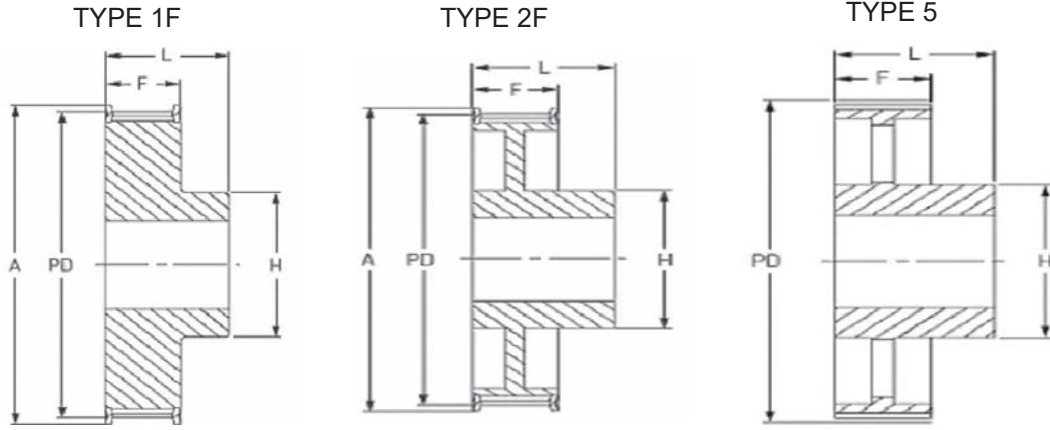


PİLOT DELİKLİ / PILOT BORE

14M40			Kayış Geniřlięi 40 mm Belt Width 40 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
28	124.78	131	1F	24	60	100	54	69
29	129.23	138	1F	24	60	100	54	69
30	133.69	142	1F	24	60	100	54	69
32	142.6	155	1F	24	70	100	54	69
34	151.52	160	1F	24	70	100	54	69
36	160.43	168	1F	24	70	100	54	69
38	169.34	178	1F	24	70	120	54	69
40	178.25	187	1F	24	70	120	54	69
44	196.08	205	1F	24	70	120	54	69
48	213.9	223	2F	24	70	135	54	69
56	249.55	258	2F	28	70	135	54	69
64	285.21	295	2F	28	70	135	54	69
72	320.86	-	5	28	70	135	54	69
80	356.51	-	5	28	70	135	54	69
90	401.07	-	5	28	70	135	54	69
112	499.11	-	5	28	70	135	54	69
144	641.71	-	5	28	70	135	54	69
168	748.66	-	5	28	70	135	54	69
192	855.62	-	5	28	70	135	54	69
216	962.57	-	5	28	80	150	54	69

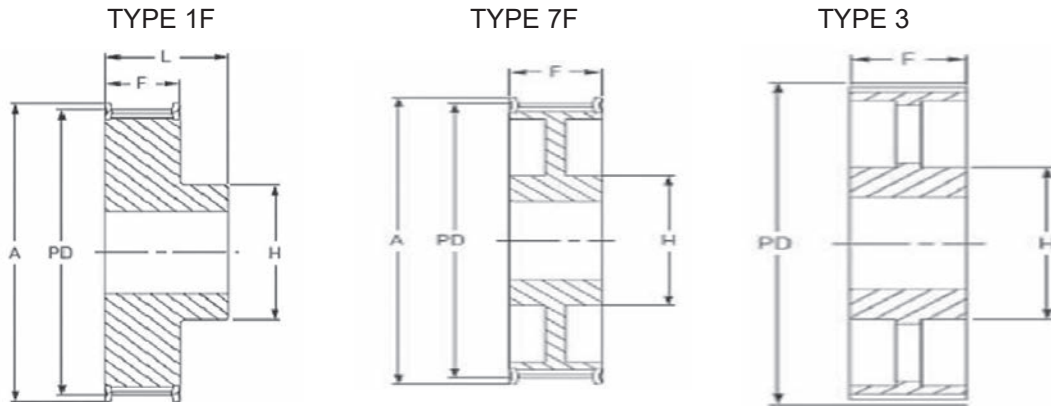


PİLOT DELİKLİ / PILOT BORE

14M55			Kayış Geniřlięi 55 mm Belt Width 55 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
28	124.78	131	1F	24	60	100	70	85
29	129.23	138	1F	24	60	100	70	85
30	133.69	142	1F	24	60	100	70	85
32	142.6	155	1F	24	70	100	70	85
34	151.52	160	1F	24	70	100	70	85
36	160.43	168	1F	24	70	100	70	85
38	169.34	178	1F	24	70	120	70	85
40	178.25	187	1F	24	70	120	70	85
44	196.08	205	1F	24	70	120	70	85
48	213.9	223	7F	24	70	135	70	70
56	249.55	258	7F	28	70	135	70	70
64	285.21	295	7F	28	70	135	70	70
72	320.86	-	3	28	70	135	70	70
80	356.51	-	3	28	70	135	70	70
90	401.07	-	3	28	70	135	70	70
112	499.11	-	3	28	70	135	70	70
144	641.71	-	3	28	70	135	70	70
168	748.66	-	3	28	70	135	70	70
192	855.62	-	3	28	70	135	70	70
216	962.57	-	3	28	80	150	70	70

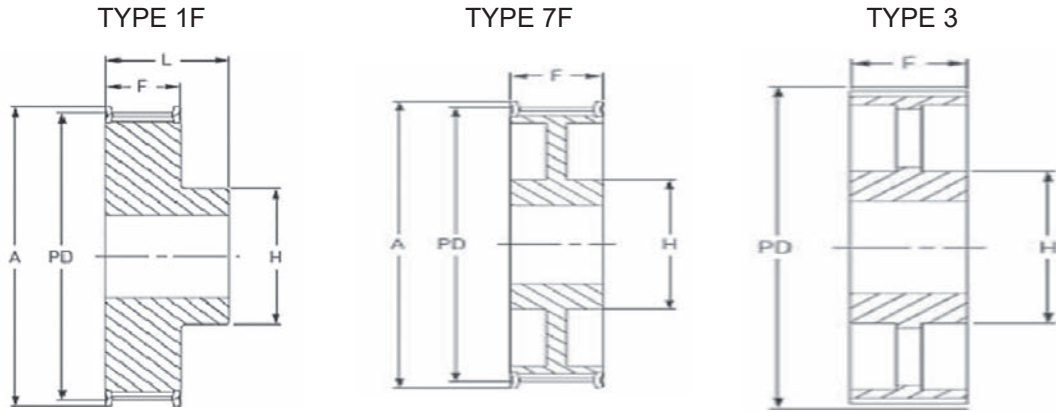


PİLOT DELİKLİ / PILOT BORE

14M85			Kayış Geniřlięi 85 mm Belt Width 85 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
28	124.78	131	1F	24	60	100	102	117
29	129.23	138	1F	24	60	100	102	117
30	133.69	142	1F	24	60	100	102	117
32	142.6	155	1F	24	60	100	102	117
34	151.52	160	1F	24	70	100	102	117
36	160.43	168	1F	32	70	100	102	117
38	169.34	178	1F	32	70	120	102	117
40	178.25	187	1F	32	70	135	102	117
44	196.08	205	1F	32	70	135	102	117
48	213.9	223	1F	32	80	150	102	117
56	249.55	258	7F	32	80	150	102	102
64	285.21	295	7F	32	80	150	102	102
72	320.86	-	3	32	80	150	102	102
80	356.51	-	3	32	80	150	102	102
90	401.07	-	3	32	80	150	102	102
112	499.11	-	3	32	80	150	102	102
144	641.71	-	3	32	80	150	102	102
168	748.66	-	3	32	80	150	102	102
192	855.62	-	3	32	90	165	102	102
216	962.57	-	3	32	90	165	102	102

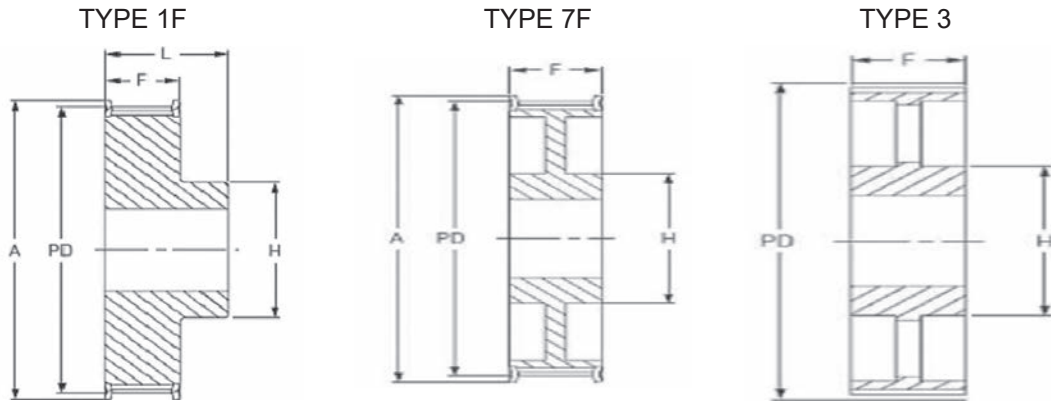

PİLOT DELİKLİ / PILOT BORE


14M115		Kayış Geniřlięi 115 mm Belt Width 115 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
28	124.78	131	1F	32	60	100	133	148
29	129.23	138	1F	32	60	100	133	148
30	133.69	142	1F	32	60	100	133	148
32	142.6	155	1F	32	60	100	133	148
34	151.52	160	1F	32	70	100	133	148
36	160.43	168	1F	32	70	120	133	148
38	169.34	178	1F	32	70	120	133	148
40	178.25	187	1F	32	70	135	133	148
44	196.08	205	1F	32	80	140	133	148
48	213.9	223	1F	32	80	150	133	148
56	249.55	258	1F	32	80	150	133	148
64	285.21	295	7F	32	80	150	133	133
72	320.86	-	3	32	80	150	133	133
80	356.51	-	3	32	80	150	133	133
90	401.07	-	3	32	80	150	133	133
112	499.11	-	3	32	80	150	133	133
144	641.71	-	3	32	90	165	133	133
168	748.66	-	3	32	90	165	133	133
192	855.62	-	3	32	90	165	133	133
216	962.57	-	3	32	90	165	133	133

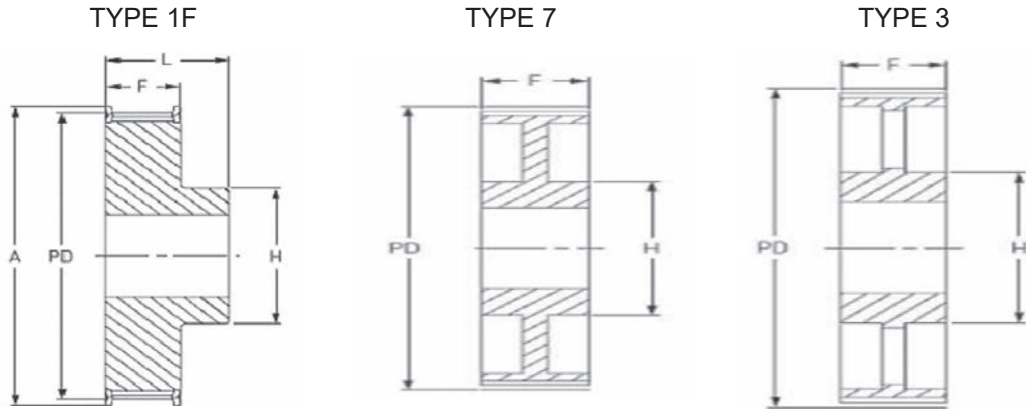


PİLOT DELİKLİ / PILOT BORE

14M170			Kayış Geniřlięi 170 mm Belt Width 170 mm					
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
28	124.78	131	1F	32	60	100	187	202
29	129.23	138	1F	32	60	100	187	202
30	133.69	142	1F	32	60	100	187	202
32	142.6	155	1F	32	60	100	187	202
34	151.52	160	1F	32	60	100	187	202
36	160.43	168	1F	32	70	120	187	202
38	169.34	178	1F	32	70	135	187	202
40	178.25	187	1F	32	85	140	187	202
44	196.08	205	1F	32	85	160	187	202
48	213.9	223	1F	32	85	160	187	202
56	249.55	258	1F	32	85	160	187	202
64	285.21	295	1F	32	100	180	187	202
72	320.86	-	7	32	100	180	187	187
80	356.51	-	7	32	100	180	187	187
90	401.07	-	3	38	100	180	187	187
112	499.11	-	3	38	110	200	187	187
144	641.71	-	3	38	120	220	187	187
168	748.66	-	3	38	120	220	187	187
192	855.62	-	3	38	120	220	187	187
216	962.57	-	3	38	120	220	187	187

TYPE 3F

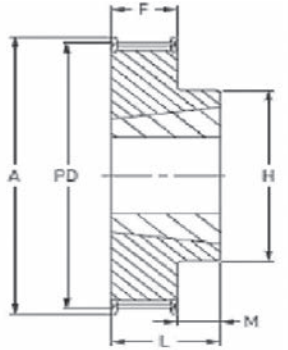


TYPE 10




KONİK BURÇLU / With Taper Bush

5M15			Kayış Geniřlięi 15 mm Belt Width 15 mm								
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
34	54.11	58	3F	1008	9	25	43	-	20.5	1.5	22
36	57.3	61	3F	1108	9	28	44	-	20.5	1.5	22
38	60.48	65	3F	1108	9	28	48	-	20.5	1.5	22
40	63.66	68	3F	1108	9	28	52	-	20.5	1.5	22
44	70.03	74	3F	1108	9	28	54	-	20.5	1.5	22
48	76.39	80	3F	1210	11	32	64	-	20.5	4.5	25
56	89.13	93	3F	1210	11	32	70	-	20.5	4.5	25
64	101.86	106	3F	1210	11	32	78	-	20.5	4.5	25
72	114.59	118	3F	1610	14	42	92	-	20.5	4.5	25
80	127.32	135	3F	1610	14	42	92	-	20.5	4.5	25
90	143.24	-	10	1610	14	42	92	2.25	20.5	2.25	25
112	178.25	-	10	1610	14	42	92	2.25	20.5	2.25	25
136	216.45	-	10	2012	14	50	112	5.75	20.5	5.75	32
150	238.73	-	10	2012	14	50	112	5.75	20.5	5.75	32


TYPE 4F




TYPE 3F



TYPE 12F




TYPE 12




KONİK BURÇLU / With Taper Bush

8M20			Kayış Geniřlięi 20 mm Belt Width 20 mm								
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
22	56.02	65	4F	1008	9	25	-	6	28	-	22
24	61.12	70	4F	1108	9	28	-	6	28	-	22
26	66.21	75	4F	1108	9	28	-	6	28	-	22
28	71.3	80	4F	1108	9	28	-	6	28	-	22
30	76.39	85	4F	1108	9	28	-	6	28	-	22
32	81.49	90	4F	1610	14	42	-	3	28	-	25
34	86.58	95	4F	1610	14	42	-	3	28	-	25
36	91.67	100	4F	1610	14	42	-	3	28	-	25
38	96.77	105	4F	1610	14	42	-	3	28	-	25
40	101.86	110	4F	1610	14	42	-	3	28	-	25
42	106.95	115	4F	1610	14	42	-	-	28	-	25
44	112.05	120	3F	2012	14	50	112	-	28	4	32
48	122.23	131	3F	2012	14	50	112	-	28	4	32
56	142.6	151	3F	2012	14	50	112	-	28	4	32
60	152.79	162	3F	2012	14	50	112	-	28	4	32
64	162.97	172	12F	2012	14	50	112	-	28	4	32
72	183.35	193	12F	2012	14	50	112	-	28	4	32
80	203.72	-	12	2517	16	50	120	-	28	17	45
90	229.18	-	12	2517	16	50	120	-	28	17	45

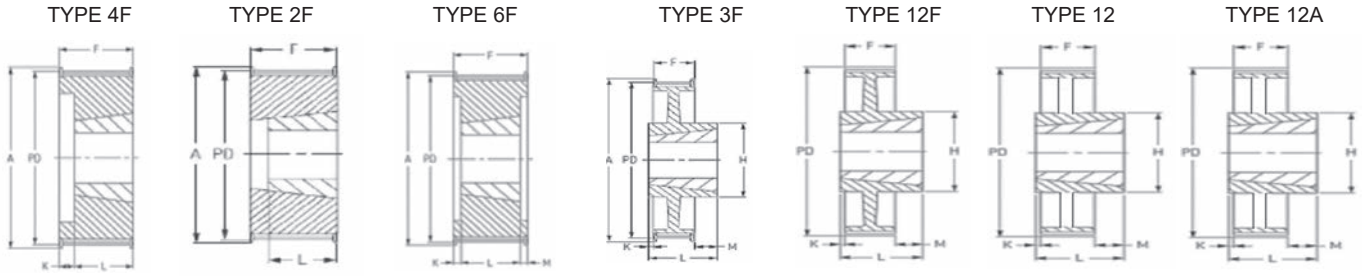

KONİK BURÇLU / With Taper Bush


8M30			Kayış Geniřlięi 30 mm Belt Width 30 mm								
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
20	50.93	60	4F	1008	9	25	-	16	38	-	22
21	53.47	62	4F	1008	9	25	-	16	38	-	22
22	56.02	65	4F	1008	9	25	-	16	38	-	22
23	58.57	65	4F	1108	9	28	-	16	38	-	22
24	61.12	70	4F	1108	9	28	-	16	38	-	22
25	63.66	71	4F	1108	9	28	-	16	38	-	22
26	66.21	75	4F	1108	9	28	-	16	38	-	22
27	68.75	75	4F	1108	9	28	-	16	38	-	22
28	71.3	80	4F	1210	11	32	-	16	38	-	25
29	73.85	85	2F	1615	14	42	-	-	38	-	38
30	76.39	85	2F	1615	14	42	-	-	38	-	38
31	78.94	87	2F	1615	14	42	-	-	38	-	38
32	81.49	90	2F	1615	14	42	-	-	38	-	38
33	84.03	90	2F	1615	14	42	-	-	38	-	38
34	86.58	95	2F	1615	14	42	-	-	38	-	38
35	89.13	95	2F	1615	14	42	-	-	38	-	38
36	91.67	100	2F	1615	14	42	-	-	38	-	38
38	96.77	105	2F	1615	14	42	-	-	38	-	38
40	101.86	110	2F	1615	14	42	-	-	38	-	38
42	106.95	111	6F	2012	14	50	-	3	38	3	32
44	112.05	121	6F	2012	14	50	-	3	38	3	32
45	114.59	121	6F	2012	14	50	-	3	38	3	32
48	122.23	131	6F	2012	14	50	-	3	38	3	32
50	127.32	131	6F	2012	14	50	-	3	38	3	32
52	132.42	140	6F	2012	14	50	-	3	38	3	32
56	142.6	151	6F	2012	14	50	-	3	38	3	32
64	162.97	172	3F	2517	16	60	120	-	38	7	45
72	183.35	192	12F	2517	16	60	120	-	38	7	45
80	203.72	-	12	2517	16	60	120	-	38	7	45
90	229.18	-	12	2517	16	60	120	-	38	7	45
112	285.21	-	12A	2517	16	60	120	-	38	7	45
144	366.69	-	12A	2517	16	60	120	-	38	7	45
168	427.81	-	12A	3020	25	75	150	-	38	13	51
192	488.92	-	12A	3525	35	90	170	-	38	26	64

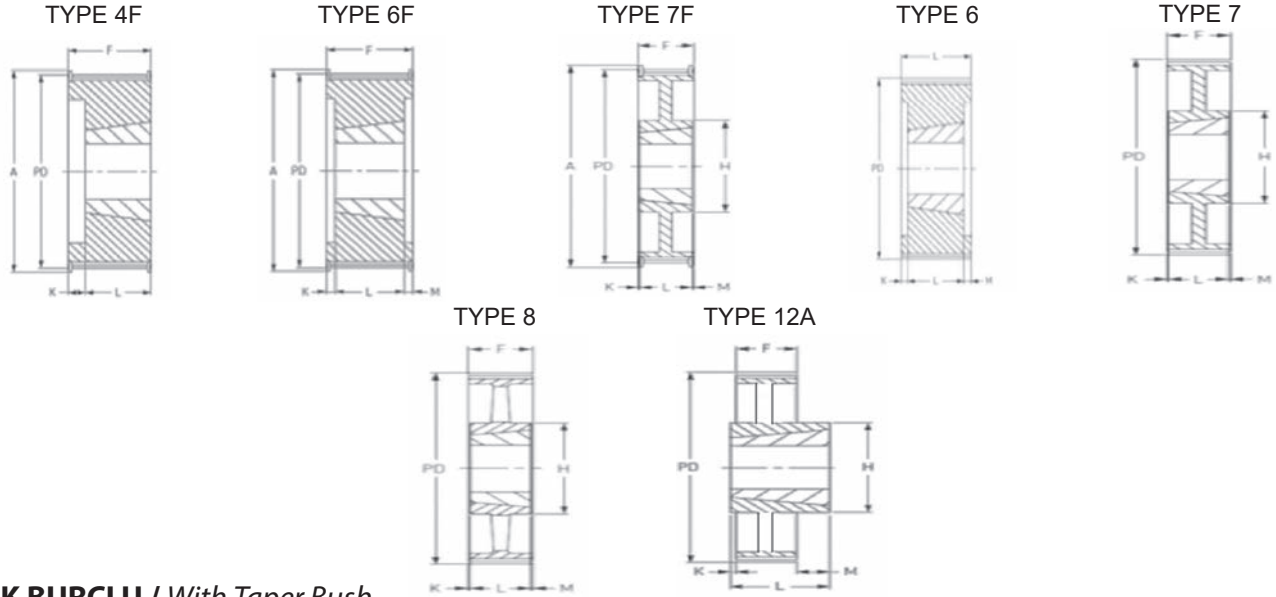


KONİK BURÇLU / With Taper Bush

8M50			Kayış Geniřlięi 50 mm Belt Width 50 mm								
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
24	61.12	70	4F	1108	9	28	-	38	60	-	22
26	66.21	75	4F	1108	9	28	-	38	60	-	22
27	68.75	75	4F	1108	9	28	-	38	60	-	22
28	71.3	80	4F	1210	11	32	-	35	60	-	25
30	76.39	85	4F	1615	14	42	-	22	60	-	38
31	78.94	87	4F	1615	14	42	-	22	60	-	38
32	81.49	90	4F	1615	14	42	-	22	60	-	38
33	84.03	90	4F	1615	14	42	-	22	60	-	38
34	86.58	95	4F	1615	14	42	-	22	60	-	38
35	89.13	95	4F	1615	14	42	-	22	60	-	38
36	91.67	100	4F	1615	14	42	-	22	60	-	38
38	96.77	105	4F	1615	14	42	-	22	60	-	38
40	101.86	110	6F	2012	14	50	-	14	60	14	32
42	106.95	111	6F	2012	14	50	-	14	60	14	32
44	112.05	121	6F	2012	14	50	-	14	60	14	32
45	114.59	121	6F	2012	14	50	-	14	60	14	32
48	122.23	131	6F	2012	14	50	-	14	60	14	32
50	127.32	131	6F	2012	14	50	-	14	60	14	32
52	132.42	140	6F	2012	14	50	-	14	60	14	32
56	142.6	151	6F	2517	16	60	-	7.5	60	7.5	45
60	152.79	156	6F	2517	16	60	-	7.5	60	7.5	45
64	162.97	172	6F	2517	16	60	-	7.5	60	7.5	45
72	183.35	192	7F	2517	16	60	120	7.5	60	7.5	45
80	203.72	-	6	3020	25	75	-	4.5	60	4.5	51
90	229.18	-	7	3020	25	75	150	4.5	60	4.5	51
112	285.21	-	7	3020	25	75	150	4.5	60	4.5	51
144	366.69	-	8	3020	25	75	150	4.5	60	4.5	51
168	427.81	-	12A	3525	35	80	170	2.5	60	2.5	65
192	488.92	-	12A	3525	35	80	170	2.5	60	2.5	65


TYPE 6F

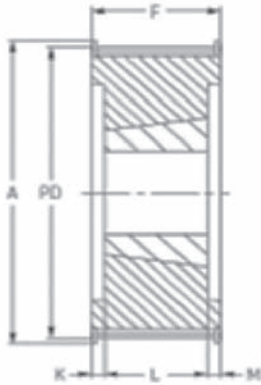


TYPE 6

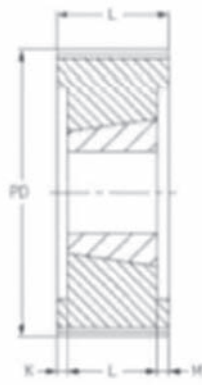

TYPE 7

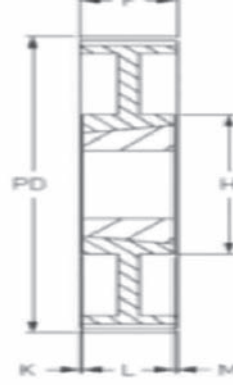


TYPE 8

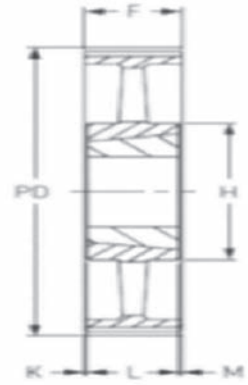


KONİK BURÇLU / With Taper Bush

8M85	Kayış Genişliği 85 mm Belt Width 85 mm										
Diş SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
24	61.12	70	6F	1108	9	28	-	36.5	95	36.5	22
26	66.21	75	6F	1108	9	28	-	36.5	95	36.5	22
27	68.75	75	6F	1108	9	28	-	36.5	95	36.5	22
28	71.3	80	6F	1210	11	32	-	35	95	35	25
30	76.39	85	6F	1615	14	42	-	28.5	95	28.5	38
31	78.94	87	6F	1615	14	42	-	28.5	95	28.5	38
32	81.49	90	6F	1615	14	42	-	28.5	95	28.5	38
33	84.03	90	6F	1615	14	42	-	28.5	95	28.5	38
34	86.58	95	6F	1615	14	42	-	28.5	95	28.5	38
35	89.13	95	6F	1615	14	42	-	28.5	95	28.5	38
36	91.67	100	6F	1615	14	42	-	28.5	95	28.5	38
38	96.77	105	6F	1615	14	42	-	28.5	95	28.5	38
40	101.86	110	6F	2012	14	50	-	31.5	95	31.5	32
42	106.95	111	6F	2012	14	50	-	31.5	95	31.5	32
44	112.05	121	6F	2012	14	50	-	31.5	95	31.5	32
45	114.59	121	6F	2012	14	50	-	31.5	95	31.5	32
48	122.23	131	6F	2517	16	60	-	25	95	25	45
50	127.32	131	6F	2517	16	60	-	25	95	25	45
52	132.42	140	6F	2517	16	60	-	25	95	25	45
56	142.6	151	6F	2517	16	60	-	25	95	25	45
60	152.79	156	6F	2517	16	60	-	25	95	25	45
64	162.97	172	6F	2517	16	60	-	25	95	25	45
72	183.35	192	6F	3020	16	60	-	22	95	22	51
80	203.72	-	6	3020	25	75	-	22	95	22	51
90	229.18	-	7	3020	25	75	150	22	95	22	51
112	285.21	-	7	3020	25	75	150	22	95	22	51
144	366.69	-	8	3525	35	80	170	15	95	15	65
168	427.81	-	8	3525	35	80	170	15	95	15	65
192	488.92	-	8	3525	35	80	170	15	95	15	65


TYPE 6F

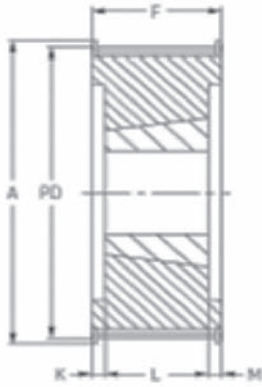


TYPE 7F

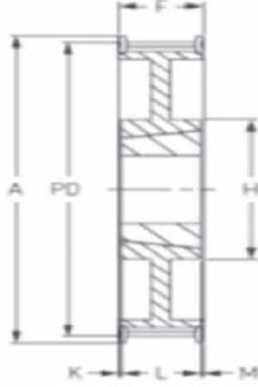

TYPE 7

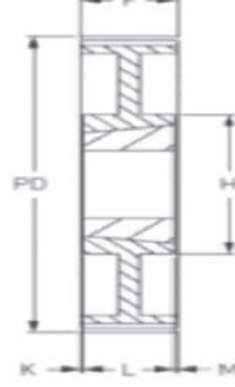


TYPE 8

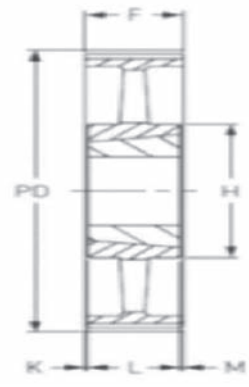

KONİK BURÇLU / With Taper Bush


14M40			Kayış Geniřlięi 40 mm Belt Width 40 mm								
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
28	124.78	141	6F	2012	14	50	-	11	54	11	32
29	129.23	141	6F	2012	14	50	-	11	54	11	32
30	133.69	156	6F	2012	14	50	-	11	54	11	32
32	142.6	156	6F	2012	14	50	-	11	54	11	32
34	151.52	165	6F	2517	16	60	-	4.5	54	4.5	45
35	155.97	173	6F	2517	16	60	-	4.5	54	4.5	45
36	160.43	173	6F	2517	16	60	-	4.5	54	4.5	45
38	169.34	182	6F	2517	16	60	-	4.5	54	4.5	45
40	178.25	191	6F	2517	16	60	-	4.5	54	4.5	45
42	187.17	209	6F	2517	16	60	-	4.5	54	4.5	45
44	196.08	209	6F	3020	25	75	-	1.5	54	1.5	51
45	200.54	227	6F	3020	25	75	-	1.5	54	1.5	51
48	213.9	227	6F	3020	25	75	-	1.5	54	1.5	51
50	222.82	246	6F	3020	25	75	-	1.5	54	1.5	51
56	249.55	264	7F	3020	25	75	150	1.5	54	1.5	51
60	267.38	281	7F	3020	25	75	150	1.5	54	1.5	51
64	285.21	296	7F	3020	25	75	150	1.5	54	1.5	51
72	320.86	-	7	3020	25	75	150	1.5	54	1.5	51
80	356.51	-	8	3020	25	75	150	1.5	54	1.5	51
90	401.07	-	8	3020	25	75	150	1.5	54	1.5	51
112	499.11	-	8	3020	25	75	150	1.5	54	1.5	51
144	641.71	-	8	3020	25	75	150	1.5	54	1.5	51
168	748.66	-	8	3020	25	75	150	1.5	54	1.5	51
192	855.62	-	8	3020	25	75	150	1.5	54	1.5	51
216	962.57	-	8	3020	25	75	150	1.5	54	1.5	51

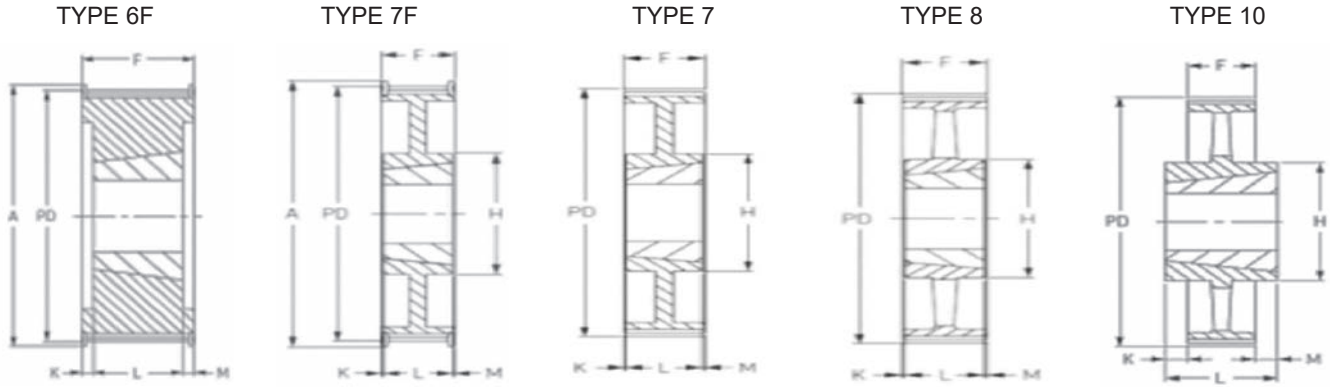


KONİK BURÇLU / With Taper Bush

14M55	Kayış Geniřlięi 55 mm Belt Width 55 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
28	124.78	141	6F	2012	14	50	-	19	70	19	32
29	129.23	141	6F	2012	14	50	-	19	70	19	32
30	133.69	156	6F	2517	16	60	-	12.5	70	12.5	45
32	142.6	156	6F	2517	16	60	-	12.5	70	12.5	45
34	151.52	165	6F	2517	16	60	-	12.5	70	12.5	45
35	155.97	173	6F	2517	16	60	-	12.5	70	12.5	45
36	160.43	173	6F	2517	16	60	-	12.5	70	12.5	45
38	169.34	182	6F	2517	16	60	-	12.5	70	12.5	45
40	178.25	191	6F	2517	16	60	-	12.5	70	12.5	45
42	187.17	209	6F	3020	25	75	-	9.5	70	9.5	51
44	196.08	209	6F	3020	25	75	-	9.5	70	9.5	51
45	200.54	227	6F	3020	25	75	-	9.5	70	9.5	51
48	213.9	227	6F	3020	25	75	-	9.5	70	9.5	51
50	222.82	246	6F	3020	25	75	-	9.5	70	9.5	51
56	249.55	264	7F	3020	25	75	150	9.5	70	9.5	51
60	267.38	281	7F	3020	25	75	150	9.5	70	9.5	51
64	285.21	296	7F	3020	25	75	150	9.5	70	9.5	51
72	320.86	-	7	3020	25	75	150	9.5	70	9.5	51
80	356.51	-	8	3020	25	75	150	9.5	70	9.5	51
90	401.07	-	8	3020	25	75	150	9.5	70	9.5	51
112	499.11	-	8	3020	25	75	150	9.5	70	9.5	51
144	641.71	-	8	3020	25	75	150	9.5	70	9.5	51
168	748.66	-	8	3020	25	75	150	9.5	70	9.5	51
192	855.62	-	8	3020	25	75	150	9.5	70	9.5	51
216	962.57	-	10	3535	35	90	170	9.5	70	9.5	89


TYPE 6F

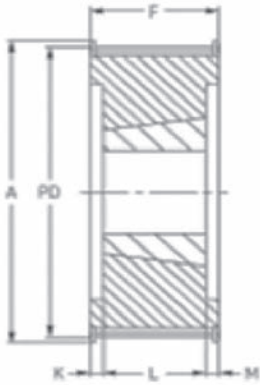


TYPE 7F

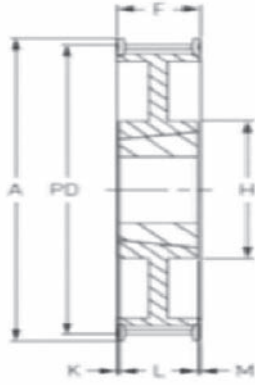

TYPE 7

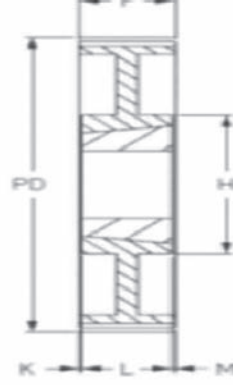


TYPE 8

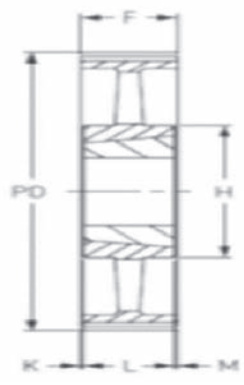


KONİK BURÇLU / With Taper Bush

14M85			Kayış Geniřlięi 85 mm Belt Width 85 mm								
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
28	124.78	141	6F	2517	16	60	-	28.5	102	28.5	45
29	129.23	141	6F	2517	16	60	-	28.5	102	28.5	45
30	133.69	156	6F	2517	16	60	-	28.5	102	28.5	45
32	142.6	156	6F	2517	16	60	-	28.5	102	28.5	45
34	151.52	165	6F	2517	16	60	-	28.5	102	28.5	45
35	155.97	173	6F	2517	16	60	-	28.5	102	28.5	45
36	160.43	173	6F	3020	25	75	-	25.5	102	25.5	51
38	169.34	182	6F	3020	25	75	-	25.5	102	25.5	51
40	178.25	191	6F	3020	25	75	-	25.5	102	25.5	51
42	187.17	209	6F	3030	35	75	-	25.5	102	25.5	51
44	196.08	209	6F	3030	35	75	-	13	102	13	76
45	200.54	227	6F	3030	35	75	-	13	102	13	76
48	213.9	227	6F	3030	35	75	-	18.5	102	18.5	65
50	222.82	246	6F	3525	35	80	-	18.5	102	18.5	65
56	249.55	264	6F	3525	35	80	170	18.5	102	18.5	65
60	267.38	281	6F	3525	35	80	170	18.5	102	18.5	65
64	285.21	296	7F	3525	35	80	170	18.5	102	18.5	65
72	320.86	-	7	3525	35	80	170	18.5	102	18.5	65
80	356.51	-	8	3525	35	80	170	18.5	102	18.5	65
90	401.07	-	8	3525	35	80	170	18.5	102	18.5	65
112	499.11	-	8	3525	35	80	170	18.5	102	18.5	65
144	641.71	-	8	4040	35	80	210	-	102	-	102
168	748.66	-	8	4040	35	80	210	-	102	-	102
192	855.62	-	8	4040	40	100	210	-	102	-	102
216	962.57	-	8	4040	40	100	210	-	102	-	102

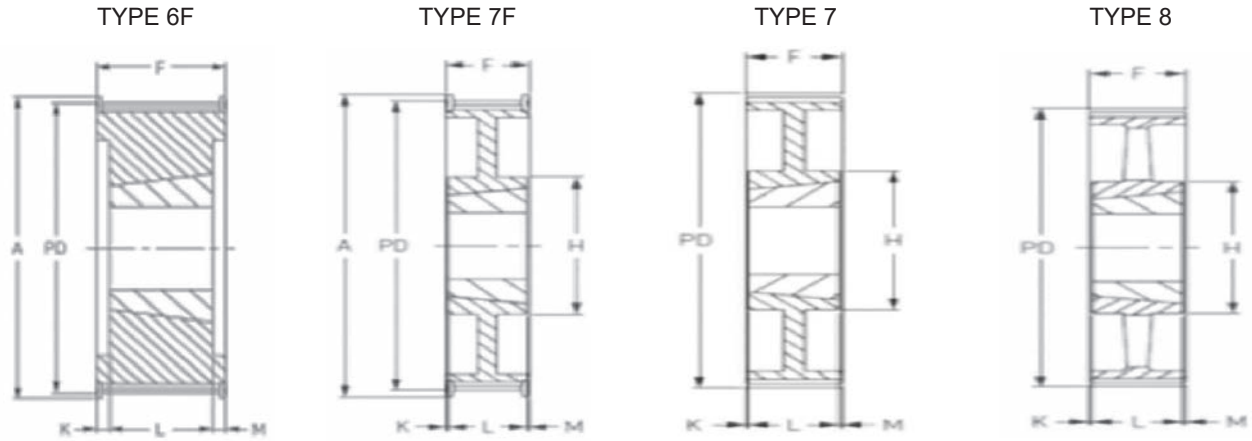


KONİK BURÇLU / With Taper Bush

14M115	Kayış Geniřlięi 115 mm Belt Width 115 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
28	124.78	141	6F	2517	16	60	-	44	133	44	45
29	129.23	141	6F	2517	16	60	-	44	133	44	45
30	133.69	156	6F	2517	16	60	-	44	133	44	45
32	142.6	156	6F	2517	16	60	-	44	133	44	45
34	151.52	165	6F	2517	16	60	-	44	133	44	45
35	155.97	173	6F	3020	25	75	-	41	133	41	51
36	160.43	173	6F	3020	25	75	-	41	133	41	51
38	169.34	182	6F	3020	25	75	-	41	133	41	51
40	178.25	191	6F	3020	25	75	-	41	133	41	51
42	187.17	209	6F	3535	35	90	-	22	133	22	89
44	196.08	209	6F	3535	35	90	-	22	133	22	89
45	200.54	227	6F	3535	35	90	-	22	133	22	89
48	213.9	227	6F	3535	35	90	-	22	133	22	89
50	222.82	246	6F	4040	40	100	-	15.5	133	15.5	102
56	249.55	264	6F	4040	40	100	-	15.5	133	15.5	102
60	267.38	281	6F	4040	40	100	-	15.5	133	15.5	102
64	285.21	296	7F	4545	55	110	240	9.5	133	9.5	114
72	320.86	-	7	4545	55	110	240	9.5	133	9.5	114
80	356.51	-	8	4545	55	110	240	9.5	133	9.5	114
90	401.07	-	8	4545	55	110	240	9.5	133	9.5	114
112	499.11	-	8	4545	55	110	240	9.5	133	9.5	114
144	641.71	-	8	4545	55	110	240	9.5	133	9.5	114
168	748.66	-	8	4545	55	110	240	9.5	133	9.5	114
192	855.62	-	8	4545	55	110	240	9.5	133	9.5	114
216	962.57	-	8	5050	70	125	265	3	133	3	127

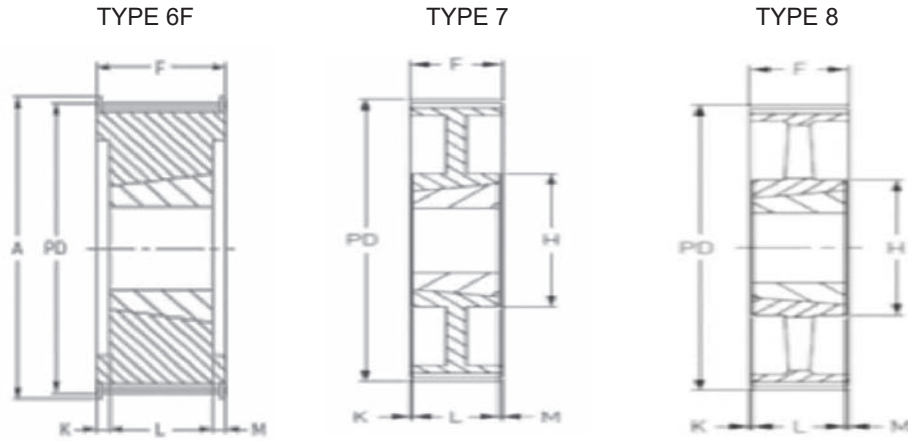

KONİK BURÇLU / With Taper Bush

14M170			Kayış Geniřlięi 170 mm Belt Width 170 mm								
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	K	F	M	L
	mm	mm			mm	mm	mm	mm	mm	mm	mm
35	155.97	173	6F	3030	25	75	-	55.5	187	55.5	76
36	160.43	173	6F	3030	25	75	-	55.5	187	55.5	76
38	169.34	182	6F	3030	25	75	-	55.5	187	55.5	76
40	178.25	191	6F	3030	25	75	-	55.5	187	55.5	76
42	187.17	209	6F	3535	35	90	-	49	187	49	89
44	196.08	209	6F	3535	35	90	-	49	187	49	89
45	200.54	227	6F	3535	35	90	-	49	187	49	89
48	213.9	227	6F	3535	35	90	-	49	187	49	89
50	222.82	246	6F	3535	35	90	-	49	187	49	89
56	249.55	264	6F	3535	35	90	-	49	187	49	89
60	267.38	281	6F	4040	40	100	-	42.5	187	42.5	102
64	285.21	296	6F	4040	40	100	-	42.5	187	42.5	102
72	320.86	-	7	4040	40	100	210	42.5	187	42.5	102
80	356.51	-	7	4040	40	100	210	42.5	187	42.5	102
90	401.07	-	8	4040	40	100	210	42.5	187	42.5	102
112	499.11	-	8	5050	70	125	265	30	187	30	127
144	641.71	-	8	5050	70	125	265	30	187	30	127
168	748.66	-	8	5050	70	125	265	30	187	30	127
192	855.62	-	8	5050	70	125	265	30	187	30	127
216	962.57	-	8	5050	70	125	265	30	187	30	127



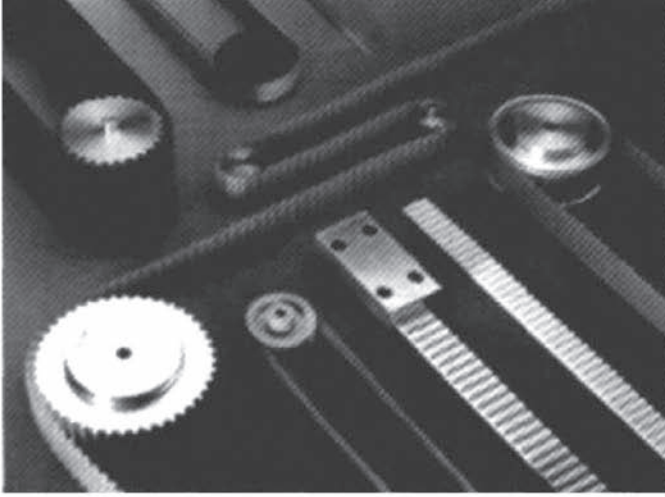



Doğrusal hareket iletme elemanı olarak kullanılabilen triger kayışları istenilen uzunlukta satılırlar. Sonsuz kayışın iki ucunu B tip bağlantı elemanlarıyla bir gövdeye, kızağa veya herhangi bir elemana sabitleyebiliriz.

The timing belt pulleys used for the linear movement transmission is sold. By meter in the markets. Two ends of the endless belt is assembled to a body or any component by the clamps.

Triger kayışları, Kramayer dişli veya Konveyör zinciri gibi de kullanılabilirler.


The timing belt pulleys are also used as linear gear the and conveyor chain.

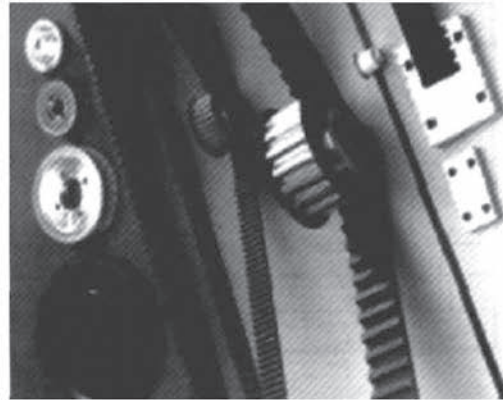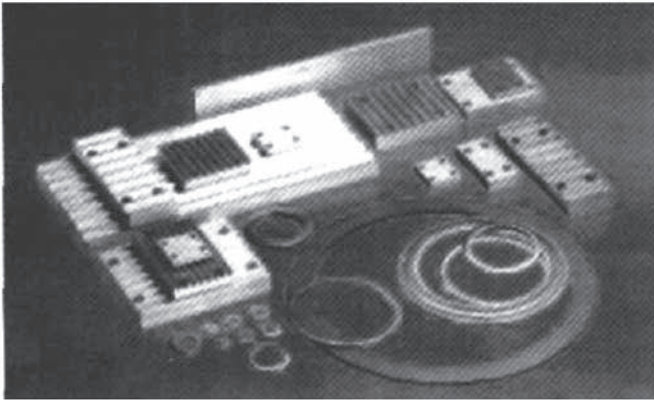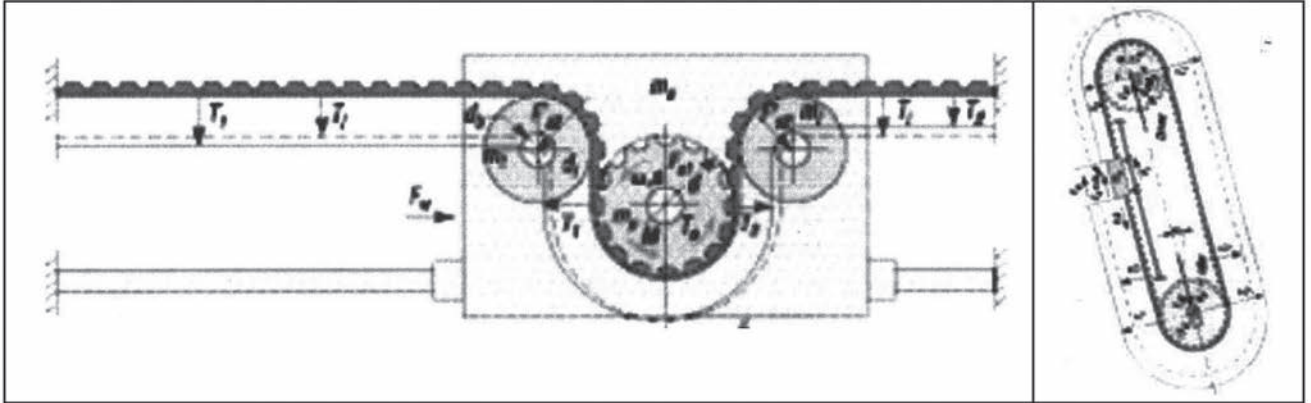

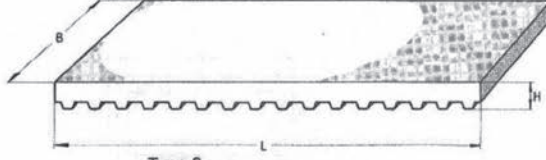

Type 0
Deliksiz Kenetleme / Clamp without holes



Parça No Part Numbers	Kayış Boyutu Belt width bmm	B mm	L mm	H mm	Kayış Tipi Belt Type
50x120 T1/1'			120	10	25.4 T1/5'
50x160 T3/8'			160	10	25.4 T3/8'
50X160 T1/2'	25.4ş	50	160	10	25.4 T1/2'
50X200 T7/8'			200	20	25.4 T7/8'
60x160 T3/8'			160	10	38.1 T3/8'
60X160 T1/2'	38.1	60	160	10	38.1 T1/2'
60X200 T7/8'			200	20	38.1 T7/8'
75x160 T3/8'			160	10	50.8 T3/8'
75X160 T1/2'	50.8	75	160	10	50.8 T1/2'
75X200 T7/8'			200	20	50.8 T7/8'
110X160 T1/2'			160	10	76.2 T1/2'
110X200 T7/8'	76.2	110	200	20	76.2 T7/8'
140X160 T1/2'			160	10	101.6 T1/2'
140X200 T7/8'	101.6	140	200	20	101.6 T7/8'

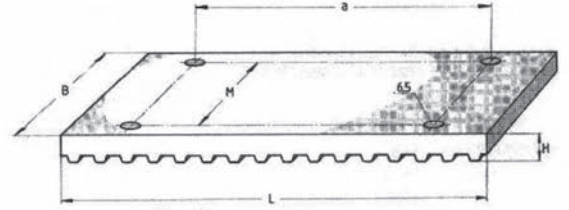



Type B
Delikli Kenetleme / Clamp with holes

Delikli Kenetleme / Clamp With Holes

Parça No Part Numbers	Kayış Boyutu Belt width bmm	B mm	L mm	M mm	H mm	a mm	Kayış Tipi Belt Type
50x120 AT5			120		10	80	25 AT5
50x160AT10			160		10	110	25 AT10
50X200AT20	25	50	200	38	20	160	25AT20
50x120 AT5			120		10	80	25T5
50x160AT10			160		10	110	25T10
50X200AT20			200		20	160	25T20
60X120AT5			120		10	80	32 AT5
60X160AT10			160		10	110	32 AT10
60X200AT20			200		20	160	32AT20
60X120T5	32	60	120	46	10	80	32T5
60X160T10			160		10	110	32T10
60X200T20			200		20	160	32T20
75X120AT5			120		10	80	50AT5
75X160AT10			160		10	110	50 AT10
75X200AT20			200		20	160	50AT20
75X120T5	50	75	120	62	10	80	50T5
75X160T10			160		10	110	50T10
75X200T20			200		20	160	50T20
110X120AT5			120		10	80	75AT5
110X160AT10			160		10	110	75 AT10
110X200AT20	75	110	200	94	20	160	75AT20
110X120T5			120		10	80	75T5
110X160T10			160		10	110	75T10
110X200T20			200		20	160	75T20
140X120AT5			120		10	80	100AT5
140X160AT10			160		10	110	100 AT10
140X200AT20	100	140	200	124	20	160	100AT20
140X120T5			120		10	80	100T5
140X160T10			160		10	110	100T10
140X200T20			200		20	160	100T20
190X160AT10			160		10	110	150AT10
190X200AT20	150	190	200	174	20	160	150 AT20
190X200T20			200		20	160	150T20

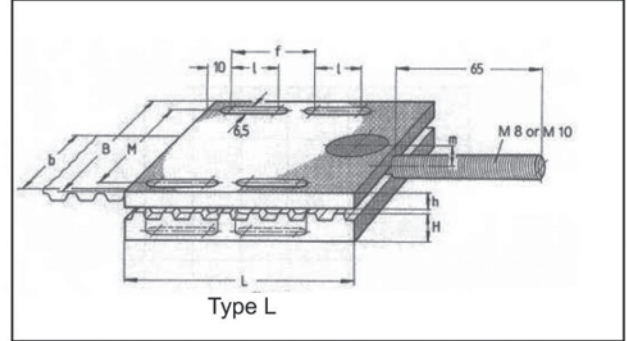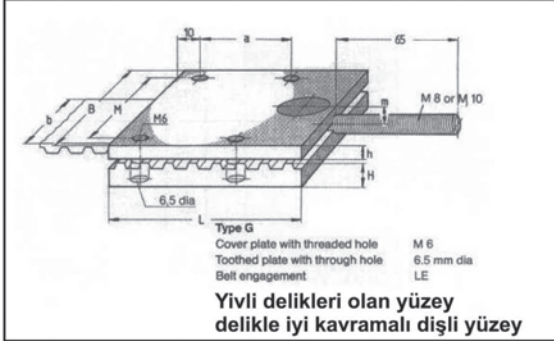


	Kayış Boy Belt Width	B mm	L mm	M mm	LE mm	a mm	H mm	h mm	m mm	l mm	l mm	Kayış Tipi Belt Type
50x80T1/5ş	25.4	50	80	38	60	40	10	6	7	15	25	25.4 T1/5ş
50x80T3/8ş	25.4	50	80	38	60	40	10	6	7	15	25	25.4 T3/8ş
50x90T1/2ş	25.4	50	90	38	70	50	10	6	7	15	35	25.4 T1/2ş
63x80T3/8ş	38.1	63	80	51	60	40	10	6	7	15	25	38.1 T3/8ş
63x90T1/2ş	38.1	63	90	51	70	50	10	6	7	15	35	38.1 T1/2ş
75.5x80T3/8ş	50.8	76	80	64	60	40	10	6	7	15	25	50.8 T3/8ş
75.5x90T1/2ş	50.8	76	90	64	70	50	10	6	7	15	35	50.8 T1/2ş
101 X90T1/2ş	76.2	101	90	89	70	50	10	8	11	15	35	76.2 T1/2ş
126x 90T1/2ş	102	126	90	114	70	50	10			15	35	101.6 T1/2ş
126x140T7/8ş	102	126	140	114	110	70	20			25	55	101.6 T7/8ş
50x80AT5 50x80 T5 50x80AT10 50x80 T10	25	50	80	38	60	40	10	6	7	15	25	25AT5 25 T5 25AT10 25 T10
50 x 130 AT20 50x130 T20	25	50	130	38	100	70	20	8	9.5	25	36	25 AT20 25 T20
60 x 80 AT5 60x80 T5 60 x 80 AT10 60x80 T10	32	60	80	46	60	40	10	6	7	15	25	32AT5 32 T5 32AT10 32 T10
60x130 AT20 60x130 T20	32	60	130	46	100	70	20	8	9.5	25	55	32AT20 32 T20
75x80AT5 75x80 T5 75x80AT10 75x80 T10	50	75	80	62	60	40	10	6	7	15	25	50AT5 50 T5 50AT10 50 T10
75 x 130 AT20 75x130 T20	50	75	130	62	100	70	20	8	9.5	25	55	50 AT20 50 T20
110x80 AT5 110x80 T5 110x80AT10 110x80 T10	75	110	80	94	60	40	10	6	7	15	25	75 AT5 75 T5 75AT10 75 T10
110x130 AT20 110x130 T20	75	110	130	94	100	70	20	8	9.5	25	55	75 AT20 75 T20
140x80AT5 140x80 T5 140x80 AT10 140x80 T10	100	140	80	124	60	40	10	6	7	15	25	100AT5 100 T5 100AT10 100 T10
140X130AT20 140x130 T20	100	140	130	124	100	70	20	8	9.5	25	55	100AT20 100 T20
190x80AT10	150	190	80	174	60	40	10	6	7	15	25	150AT10
190x130 AT20 190x130 T20	150	190	130	174	100	70	20	8	9.5	25	55	150AT20 150 T20

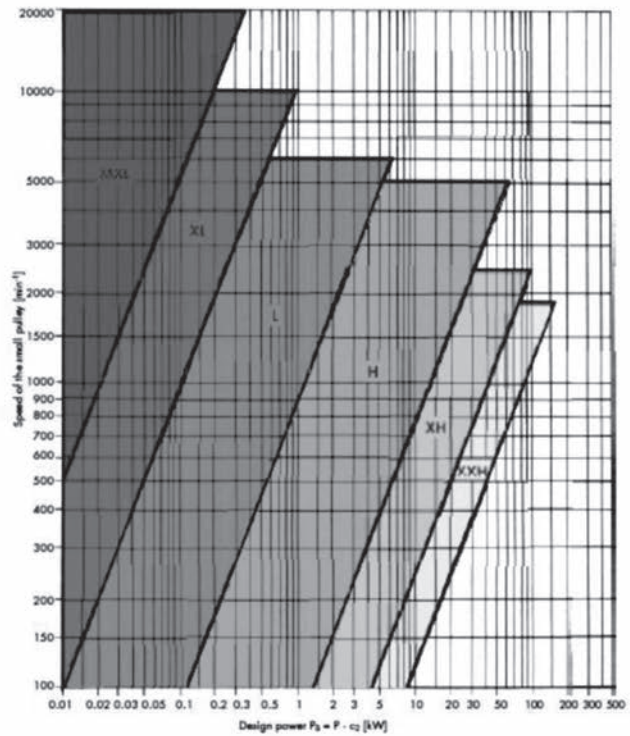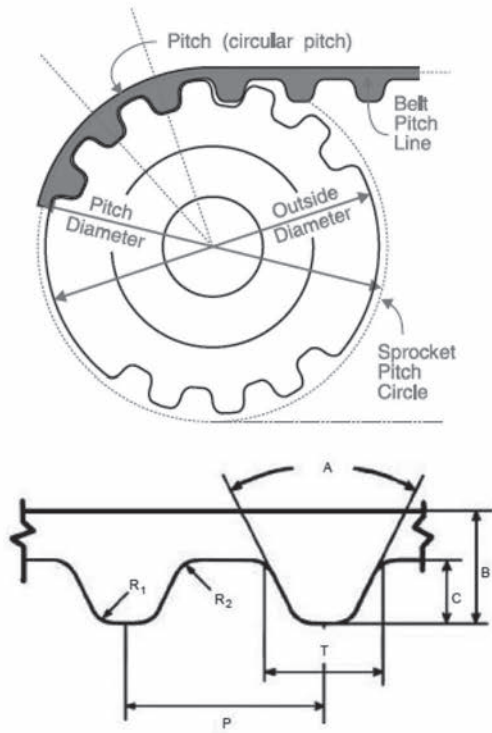


KASNAK Pulley	A	B	C	T	P	R1	R2
XL	50°	2.3	1.27	2.57	5.08	0.38	0.38
L	40°	3.6	1.91	4.65	9.53	0.51	0.51
H	40°	4	2.29	6.12	12.7	1.02	1.02
XH	40°	11.2	6.35	12.57	22.23	1.19	1.57
XXH	40°	15.7	9.53	19.05	31.75	1.52	2.29


TİP Type	ADIM / Pitch	
	inc	mm
XL	50°	2.3
L	40°	3.6
H	40°	4
XH	40°	11.2
XXH	40°	15.7

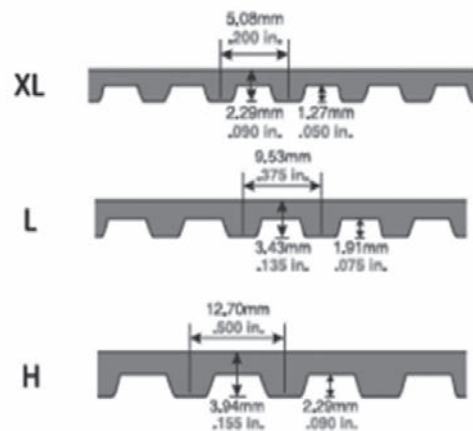

TYPE 1F



TYPE 1



XL 1/5" (5,08mm)


PİLOT DELİKLİ / Pilot Bore

XL037				Kayış Geniřlięi 6,4-7,9-9,5 mm For Belt Widths 6,4-7,9-9,5 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	16.17	23	1F	5	5	9.5	14.3	19.8
11	17.79	23	1F	5	5	9.5	14.3	19.8
12	19.4	25	1F	5	8	12.7	14.3	19.8
13	21.02	25	1F	6	8	12.7	14.3	19.8
14	22.64	28	1F	6	9	14.3	14.3	19.8
15	24.26	28	1F	6	11	15.9	14.3	19.8
16	25.87	32	1F	6	2	17.5	14.3	19.8
17	27.49	36	1F	6	13	20	14.3	19.8
18	29.11	36	1F	6	13	20.6	14.3	19.8
19	30.72	36	1F	6	13	23.8	14.3	19.8
20	32.34	38	1F	6	15	23.8	14.3	22.2
21	33.96	38	1F	6	15	25.4	14.3	22.2
22	35.57	42	1F	6	16	27	14.3	22.2
24	38.81	44	1F	6	18	30	14.3	22.2
26	42.04	48	1F	6	20	30	14.3	22.2
27	43.66	48	1F	6	20	30.2	14.3	22.2
28	45.28	51	1F	6	20	30.2	14.3	22.2
29	46.89	51	1F	6	20	34.9	14.3	22.2
30	48.51	54	1F	6	24	40	14.3	22.2
32	51.74	-	1	8	25	38	14.3	25.4
34	54.98	-	1	8	25	38	14.3	25.4
35	56.6	-	1	8	25	45	14.3	25.4
36	58.21	-	1	8	30	45	14.3	25.4
38	61.45	-	1	8	30	45	14.3	25.4
40	64.68	-	1	8	30	45	14.3	25.4
42	67.91	-	1	8	30	45	14.3	25.4
44	71.15	-	1	8	30	45	14.3	25.4
45	72.77	-	1	8	30	45	14.3	25.4
48	77.62	-	1	8	30	45	14.3	25.4
60	97.02	-	1	8	30	45	14.3	25.4
72	116.43	-	1	8	30	45	14.3	25.4


L 3/8"(9.525mm)
PILOT DELİKLİ / Pilot Bore

L050			Kayış Geniřlięi 12,7 mm For Belt Widths 12,7 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	30.32	36	1F	6	14	22	19	26
11	33.35	39	1F	6	14	22	19	26
12	36.38	42	1F	6	20	28	19	26
13	39.41	44	1F	6	20	30	19	26
14	42.45	48	1F	8	20	33	19	26
15	45.48	51	1F	8	23	36	19	26
16	48.51	54	1F	8	24	38	19	26
17	51.54	57	1F	10	24	40	19	26
18	54.57	60	1F	10	27	40	19	26
19	57.61	63	1F	10	27	40	19	26
20	60.64	66	1F	10	30	46	19	26
21	63.67	71	1F	10	30	46	19	26
22	66.7	75	1F	10	33	50	19	26
23	69.73	78	1F	10	33	50	19	26
24	72.77	79	1F	12	33	50	19	26
25	75.8	85	1F	12	33	50	19	26
26	78.83	87	1F	12	33	50	19	26
27	81.86	91	1F	12	33	50	19	26
28	84.89	91	1F	12	33	50	19	26
29	87.93	91	1F	12	33	50	19	26
30	90.96	97	1F	12	33	50	19	26
31	93.99	103	1F	12	33	50	19	26
32	97.02	103	1F	12	33	50	19	26
33	100.05	106	1F	12	33	50	19	26
34	103.08	115	1F	12	33	50	19	26
35	106.12	115	1F	12	33	50	19	26
36	109.15	115	1F	12	33	50	19	26
38	115.21	127	1F	12	33	50	19	26
40	121.28	127	1F	12	33	50	19	26
42	127.34	139	1F	12	33	50	19	26
44	133.4	140	1F	12	33	50	19	26
45	136.44	152	1F	12	33	50	19	26
48	145.53	152	1F	12	33	50	19	26
50	151.6	-	5	12	33	50	19	26
52	157.66	-	5	12	33	50	19	26
56	169.79	-	5	12	33	50	19	26
57	172.82	-	5	12	33	50	19	26
60	181.91	-	5	15	45	75	19	28
72	218.3	-	5	15	45	75	19	28
76	230.43	-	5	15	45	75	19	28
84	254.68	-	5	15	45	75	19	28
95	283.03	-	5	15	45	75	19	28
96	291.06	-	5	15	45	75	19	28

TYPE 1F




TYPE 5




L 3/8"(9.525mm)
PİLOT DELİKLİ / Pilot Bore

L075				Kayış Geniřlięi 19,1 mm For Belt Widths 19,1 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	30.32	36	1F	6	14	22	25.4	38
11	33.35	39	1F	6	14	22	25.4	38
12	36.38	42	1F	6	20	28	25.4	38
13	39.41	45	1F	6	20	28	25.4	38
14	42.45	48	1F	8	20	28	25.4	38
15	45.48	51	1F	8	23	32	25.4	38
16	48.51	54	1F	8	24	36	25.4	38
17	51.54	57	1F	10	24	38	25.4	38
18	54.57	60	1F	10	27	40	25.4	38
19	57.61	63	1F	10	27	40	25.4	38
20	60.64	66	1F	10	30	46	25.4	38
21	63.67	69	1F	10	30	46	25.4	38
22	66.7	72	1F	10	33	50	25.4	38
23	69.73	78	1F	10	33	50	25.4	38
24	72.77	78	1F	12	33	50	25.4	38
25	75.8	85	1F	12	33	50	25.4	38
26	78.83	85	1F	12	33	50	25.4	38
27	81.86	91	1F	12	33	50	25.4	38
28	84.89	91	1F	12	33	50	25.4	38
29	87.93	91	1F	12	33	50	25.4	38
30	90.96	97	1F	12	33	50	25.4	38
31	93.99	103	1F	12	33	50	25.4	38
32	97.02	103	1F	12	33	50	25.4	38
33	100.05	106	1F	12	33	50	25.4	38
34	103.08	115	1F	12	33	50	25.4	38
35	106.12	115	1F	12	33	50	25.4	38
36	109.15	115	1F	12	33	50	25.4	38
38	115.21	127	1F	12	33	50	25.4	38
40	121.28	127	1F	12	33	50	25.4	38
42	127.34	139	1F	12	33	50	25.4	38
44	133.4	139	1F	12	33	50	25.4	38
45	136.44	152	1F	12	33	50	25.4	38
48	145.53	152	1F	12	33	50	25.4	38
50	151.6	-	5	12	33	50	25.4	38
52	157.66	-	5	12	33	50	25.4	38
56	169.79	-	5	12	33	50	25.4	38
57	172.82	-	5	12	33	50	25.4	38
60	191.91	-	5	15	45	75	25.4	45
72	218.3	-	5	15	45	75	25.4	45
76	230.43	-	5	15	45	75	25.4	45
84	254.68	-	5	15	45	75	25.4	45
95	283.03	-	5	15	45	75	25.4	45
96	291.06	-	5	15	45	75	25.4	45
120	363.83	-	5	15	70	120	25.4	45

TYPE 1F




TYPE 5




L 3/8"(9.525mm)
PILOT DELİKLİ / Pilot Bore

L100			Kayış Geniřlięi 25,4 mm For Belt Widths 25,4 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	30.32	36	1F	6	14	22	32	45
11	33.35	39	1F	6	14	22	32	45
12	36.38	42	1F	6	20	28	32	45
13	39.41	45	1F	6	20	28	32	45
14	42.45	48	1F	8	20	28	32	45
15	45.48	51	1F	8	23	32	32	45
16	48.51	54	1F	8	24	36	32	45
17	51.54	57	1F	10	24	38	32	45
18	54.57	60	1F	10	27	40	32	45
19	57.61	63	1F	10	27	40	32	45
20	60.64	66	1F	10	30	46	32	45
21	63.67	69	1F	10	30	46	32	45
22	66.7	72	1F	10	33	50	32	45
23	69.73	78	1F	10	33	50	32	45
24	72.77	78	1F	12	33	50	32	45
25	75.8	85	1F	12	33	50	32	45
26	78.83	85	1F	12	33	50	32	45
27	81.86	91	1F	12	33	50	32	45
28	84.89	91	1F	12	33	50	32	45
29	87.93	91	1F	12	33	50	32	45
30	90.96	97	1F	12	33	50	32	45
31	93.99	103	1F	12	33	50	32	45
32	97.02	103	1F	12	33	50	32	45
33	100.05	106	1F	12	33	50	32	45
34	103.08	115	1F	12	33	50	32	45
35	106.12	115	1F	12	33	50	32	45
36	109.15	115	1F	12	33	50	32	45
38	115.21	127	1F	12	33	50	32	45
40	121.28	127	1F	12	33	50	32	45
42	127.34	139	1F	12	33	50	32	45
44	133.4	139	1F	12	33	50	32	45
45	136.44	152	1F	12	33	50	32	45
48	145.53	152	1F	12	33	50	32	45
50	151.6	-	5	12	33	50	32	45
52	157.66	-	5	12	33	50	32	45
56	169.79	-	5	12	33	50	32	45
57	172.82	-	5	12	33	50	32	45
60	191.91	-	5	15	45	75	32	45
72	218.3	-	5	15	45	75	32	45
76	230.43	-	5	15	45	75	32	45
84	254.68	-	5	15	45	75	32	45
95	283.03	-	5	15	45	75	32	45
96	291.06	-	5	15	45	75	32	45
120	363.83	-	5	15	70	120	32	45

TYPE 1F




TYPE 5

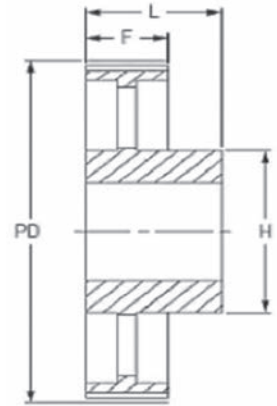


H 1/2" (12,7mm)
PİLOT DELİKLİ / Pilot Bore

H075				Kayış Geniřlięi 19,1 mm For Belt Widths 19,1 mm				
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	27	40
15	60.64	67	1F	10	30	46	27	40
16	64.68	71	1F	10	30	45	27	40
17	68.72	75	1F	10	30	46	27	40
18	72.77	79	1F	12	36	55	27	40
19	76.81	83	1F	12	40	60	27	40
20	80.85	87	1F	12	41	62	27	40
21	84.89	91	1F	12	43	67	27	40
22	88.94	95	1F	12	45	70	27	40
23	92.98	98	1F	12	46	72	27	40
24	97.02	103	1F	12	47	75	27	40
25	101.06	107	1F	12	47	75	27	40
26	105.11	111	1F	15	54	80	27	40
27	109.15	115	1F	15	54	80	27	40
28	113.19	119	1F	15	54	80	27	40
29	117.23	123	1F	15	54	80	27	40
30	121.28	127	1F	15	54	80	27	40
31	125.32	131	1F	15	54	80	27	40
32	129.36	135	1F	15	54	80	27	40
33	133.4	142	1F	15	54	80	27	40
34	137.45	142	1F	15	54	80	27	40
35	141.49	151	1F	15	54	80	27	40
36	145.53	151	1F	20	54	80	27	40
38	153.62	158	1F	20	54	80	27	40
40	161.7	168	1F	20	54	80	27	40
42	169.79	184	1F	20	54	80	27	40
44	177.87	184	5F	20	54	80	27	40
45	181.91	192	5F	20	54	80	27	40
48	194.04	200	5F	20	54	80	27	40
50	202.13	-	5	20	54	80	27	40


TYPE 1F



TYPE 5F

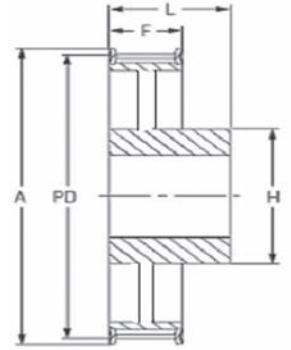


TYPE 5




H 1/2" (12,7mm)
PILOT DELİKLİ / Pilot Bore

H100	Kayış Geniřlięi 25,4 mm For Belt Widths 25,4 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	33.3	45
15	60.64	67	1F	10	30	46	33.3	45
16	64.68	71	1F	10	30	46	33.3	45
17	68.72	75	1F	10	30	46	33.3	45
18	72.77	79	1F	12	36	55	33.3	45
19	76.81	83	1F	12	40	60	33.3	45
20	80.85	87	1F	12	41	62	33.3	45
21	84.89	91	1F	12	43	67	33.3	45
22	88.94	95	1F	12	45	70	33.3	45
23	92.98	98	1F	12	46	72	33.3	45
24	97.02	103	1F	12	47	75	33.3	45
25	101.06	107	1F	12	47	75	33.3	45
26	105.11	111	1F	15	54	80	33.3	45
27	109.15	115	1F	15	54	80	33.3	45
28	113.19	119	1F	15	54	80	33.3	45
29	117.23	123	1F	15	54	80	33.3	45
30	121.28	127	1F	15	54	80	33.3	45
31	125.32	131	1F	15	54	80	33.3	45
32	129.36	135	1F	15	54	80	33.3	45
33	133.4	142	1F	15	54	80	33.3	45
34	137.45	142	1F	15	54	80	33.3	45
35	141.49	151	1F	15	54	80	33.3	45
36	145.53	151	1F	20	54	80	33.3	45
38	153.62	158	1F	20	54	80	33.3	45
40	161.7	168	1F	20	54	80	33.3	45
42	169.79	184	1F	20	54	80	33.3	45
44	177.87	184	5F	20	54	80	33.3	50
45	181.91	192	5F	20	54	80	33.3	50
48	194.04	200	5F	20	54	90	33.3	50
50	202.13	-	5	20	54	90	33.3	50
52	210.21	-	5	20	54	90	33.3	50
57	230.42	-	5	20	54	90	33.3	50
58	234.47	-	5	20	54	90	33.3	50
60	242.55	-	5	20	70	120	33.3	50
70	282.98	-	5	20	70	120	33.3	55
72	291.06	-	5	20	70	120	33.3	55
76	307.23	-	5	20	70	120	33.3	55
84	339.57	-	5	20	70	120	33.3	55
96	388.08	-	5	24	70	120	33.3	60
120	485.1	-	5	24	70	120	33.3	60
156	630.63	-	5	24	70	120	33.3	60


TYPE 1F



TYPE 5F




TYPE 5




H 1/2" (12,7mm)
PİLOT DELİKLİ / Pilot Bore

H150	Kayış Geniřlięi 38,1 mm For Belt Widths 38,1 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	46	58
15	60.64	67	1F	10	30	46	46	58
16	64.68	71	1F	10	30	46	46	58
17	68.72	75	1F	10	30	46	46	58
18	72.77	79	1F	12	36	55	46	58
19	76.81	83	1F	12	40	60	46	58
20	80.85	87	1F	12	41	62	46	58
21	84.89	91	1F	12	43	67	46	58
22	88.94	95	1F	12	45	70	46	58
23	92.98	98	1F	12	46	72	46	58
24	97.02	103	1F	12	47	75	46	58
25	101.06	107	1F	12	47	75	46	58
26	105.11	111	1F	15	54	80	46	58
27	109.15	115	1F	15	54	80	46	58
28	113.19	119	1F	15	54	80	46	58
29	117.23	123	1F	15	54	80	46	58
30	121.28	127	1F	15	54	80	46	58
31	125.32	131	1F	15	54	80	46	58
32	129.36	135	1F	15	54	80	46	58
33	133.4	142	1F	15	54	80	46	58
34	137.45	142	1F	15	54	80	46	58
35	141.49	151	1F	15	54	80	46	58
36	145.53	151	1F	20	54	80	46	58
38	153.62	158	1F	20	54	80	46	58
40	161.7	168	1F	20	54	80	46	58
42	169.79	184	1F	20	54	80	46	58
44	177.87	184	5F	20	54	80	46	58
45	181.91	192	5F	20	54	80	46	58
48	194.04	200	5F	20	54	90	46	65
50	202.13	-	5	20	54	90	46	65
52	210.21	-	5	20	54	90	46	65
57	230.42	-	5	20	54	90	46	65
58	234.47	-	5	20	54	90	46	65
60	242.55	-	5	20	70	120	46	65
70	282.98	-	5	20	70	120	46	65
72	291.06	-	5	20	70	120	46	65
76	307.23	-	5	20	70	120	46	65
84	339.57	-	5	20	70	120	46	65
96	388.08	-	5	24	70	120	46	65
120	485.1	-	5	24	70	120	46	65
156	630.63	-	5	24	70	120	46	65


TYPE 1F



TYPE 5F




TYPE 5




H 1/2" (12,7mm)
PILOT DELİKLİ / Pilot Bore

H200	Kayış Geniřlięi 50,8 mm For Belt Widths 50,8 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	59.5	70
15	60.64	67	1F	10	30	46	59.5	70
16	64.68	71	1F	10	30	46	59.5	70
17	68.72	75	1F	10	30	46	59.5	70
18	72.77	79	1F	12	36	55	59.5	70
19	76.81	83	1F	12	40	60	59.5	70
20	80.85	87	1F	12	41	62	59.5	70
21	84.89	91	1F	12	43	67	59.5	70
22	88.94	95	1F	12	45	70	59.5	70
23	92.98	98	1F	12	46	72	59.5	70
24	97.02	103	1F	12	47	75	59.5	70
25	101.06	107	1F	12	47	75	59.5	70
26	105.11	111	1F	15	54	80	59.5	70
27	109.15	115	1F	15	54	80	59.5	70
28	113.19	119	1F	15	54	80	59.5	70
29	117.23	123	1F	15	54	80	59.5	70
30	121.28	127	1F	15	54	80	59.5	70
31	125.32	131	1F	15	54	80	59.5	70
32	129.36	135	1F	15	54	80	59.5	70
33	133.4	142	1F	15	54	80	59.5	70
34	137.45	142	1F	15	54	80	59.5	70
35	141.49	151	1F	15	54	80	59.5	70
36	145.53	151	1F	20	54	80	59.5	70
38	153.62	158	1F	20	54	80	59.5	70
40	161.7	168	1F	20	54	80	59.5	70
42	169.79	184	1F	20	54	80	59.5	70
44	177.87	184	5F	20	54	80	59.5	70
45	181.91	192	5F	20	54	80	59.5	70
48	194.04	200	5F	20	54	90	59.5	75
50	202.13	-	5	20	54	90	59.5	75
52	210.21	-	5	20	54	90	59.5	75
57	230.42	-	5	20	54	90	59.5	75
58	234.47	-	5	20	54	90	59.5	75
60	242.55	-	5	20	70	120	59.5	75
70	282.98	-	5	20	70	120	59.5	75
72	291.06	-	5	20	70	120	59.5	75
76	307.23	-	5	20	70	120	59.5	75
84	339.57	-	5	20	70	120	59.5	75
96	388.08	-	5	24	70	120	59.5	75
120	485.1	-	5	24	70	120	59.5	75
156	630.63	-	5	24	70	130	59.5	75


TYPE 1F



TYPE 5F




TYPE 5




H 1/2" (12,7mm)
PILOT DELİKLİ / Pilot Bore

H300	Kayış Geniřlięi 76,2 mm For Belt Widths 76,2 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	85.5	100
15	60.64	67	1F	10	30	46	85.5	100
16	64.68	71	1F	10	30	46	85.5	100
17	68.72	75	1F	10	30	46	85.5	100
18	72.77	79	1F	12	36	55	85.5	100
19	76.81	83	1F	12	40	60	85.5	100
20	80.85	87	1F	12	41	62	85.5	100
21	84.89	91	1F	12	43	67	85.5	100
22	88.94	95	1F	12	45	70	85.5	100
23	92.98	98	1F	12	46	72	85.5	100
24	97.02	103	1F	12	47	75	85.5	100
25	101.06	107	1F	12	47	75	85.5	100
26	105.11	111	1F	15	54	80	85.5	100
27	109.15	115	1F	15	54	80	85.5	100
28	113.19	119	1F	15	54	80	85.5	100
29	117.23	123	1F	15	54	80	85.5	100
30	121.28	127	1F	15	54	80	85.5	100
31	125.32	131	1F	15	54	80	85.5	100
32	129.36	135	1F	15	54	80	85.5	100
33	133.4	142	1F	15	54	80	85.5	100
34	137.45	142	1F	15	54	80	85.5	100
35	141.49	151	1F	15	54	80	85.5	100
36	145.53	151	1F	20	54	80	85.5	100
38	153.62	158	1F	20	54	80	85.5	100
40	161.7	168	1F	20	54	80	85.5	100
42	169.79	184	1F	20	54	80	85.5	100
44	177.87	184	5F	20	54	80	85.5	100
45	181.91	192	5F	20	54	80	85.5	100
48	194.04	200	5F	20	54	90	85.5	100
50	202.13	-	5	20	54	90	85.5	100
52	210.21	-	5	20	54	90	85.5	100
57	230.42	-	5	20	54	90	85.5	100
58	234.47	-	5	20	54	90	85.5	100
60	242.55	-	5	20	70	120	85.5	100
70	282.98	-	5	20	70	120	85.5	100
72	291.06	-	5	20	70	120	85.5	100
76	307.23	-	5	20	70	120	85.5	100
84	339.57	-	5	20	70	120	85.5	100
96	388.08	-	5	24	70	120	85.5	100
120	485.1	-	5	24	70	120	85.5	100
156	630.63	-	5	24	70	130	85.5	100


TYPE 1F



TYPE 5F




TYPE 5




XH 7/8"(22,225mm)
PILOT DELİKLİ / Pilot Bore

XH200	Kayış Geniřlięi 50,8 mm For Belt Widths 50,8 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
18	127.34	141	1F	24	67	100	65.1	80
19	134.41	146	1F	24	67	100	65.1	80
20	141.49	155	1F	24	67	100	65.1	80
21	148.56	169	1F	24	73	110	65.1	80
22	155.64	176	1F	24	73	110	65.1	80
24	169.79	183	1F	24	8	120	65.1	80
25	176.86	198	1F	24	80	120	65.1	80
26	183.93	205	1F	24	80	120	65.1	80
27	191.01	212	1F	24	80	120	65.1	80
28	198.09	212	1F	24	80	120	65.1	80
30	212.23	226	1F	24	80	120	65.1	80
32	226.38	240	1F	24	80	120	65.1	80
34	240.53	256	1F	24	80	120	65.1	80
38	268.83	-	5	28	100	150	65.1	80
40	282.98	-	5	28	100	150	65.1	100
48	339.57	-	5	28	100	150	65.1	100
60	424.47	-	5	28	100	150	65.1	100

TYPE 1F




TYPE 5




XH 7/8"(22,225mm)
PILOT DELİKLİ / Pilot Bore

XH300	Kayış Geniřlięi 76,2 mm For Belt Widths 76,2 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
18	127.34	141	1F	24	67	100	92.1	110
19	134.41	146	1F	24	67	100	92.1	110
20	141.49	155	1F	24	67	100	92.1	110
21	148.56	169	1F	24	73	110	92.1	110
22	155.64	176	1F	24	73	110	92.1	110
24	169.79	183	1F	24	8	120	92.1	110
25	176.86	198	1F	24	80	120	92.1	110
26	183.93	205	1F	24	80	120	92.1	110
27	191.01	212	1F	24	80	120	92.1	110
28	198.09	212	1F	24	80	120	92.1	110
30	212.23	226	1F	24	80	120	92.1	110
32	226.38	240	1F	24	80	120	92.1	110
34	240.53	256	1F	24	80	120	92.1	110
38	268.83	-	5	28	100	150	92.1	120
40	282.98	-	5	28	100	150	92.1	120
48	339.57	-	5	28	100	150	92.1	120
60	424.47	-	5	28	100	150	92.1	120

TYPE 1F




TYPE 5




H 1/2" (12,7mm)
PILOT DELİKLİ / Pilot Bore

H300	Kayış Geniřlięi 76,2 mm For Belt Widths 76,2 mm							
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
14	56.6	63	1F	10	27	40	85.5	100
15	60.64	67	1F	10	30	46	85.5	100
16	64.68	71	1F	10	30	46	85.5	100
17	68.72	75	1F	10	30	46	85.5	100
18	72.77	79	1F	12	36	55	85.5	100
19	76.81	83	1F	12	40	60	85.5	100
20	80.85	87	1F	12	41	62	85.5	100
21	84.89	91	1F	12	43	67	85.5	100
22	88.94	95	1F	12	45	70	85.5	100
23	92.98	98	1F	12	46	72	85.5	100
24	97.02	103	1F	12	47	75	85.5	100
25	101.06	107	1F	12	47	75	85.5	100
26	105.11	111	1F	15	54	80	85.5	100
27	109.15	115	1F	15	54	80	85.5	100
28	113.19	119	1F	15	54	80	85.5	100
29	117.23	123	1F	15	54	80	85.5	100
30	121.28	127	1F	15	54	80	85.5	100
31	125.32	131	1F	15	54	80	85.5	100
32	129.36	135	1F	15	54	80	85.5	100
33	133.4	142	1F	15	54	80	85.5	100
34	137.45	142	1F	15	54	80	85.5	100
35	141.49	151	1F	15	54	80	85.5	100
36	145.53	151	1F	20	54	80	85.5	100
38	153.62	158	1F	20	54	80	85.5	100
40	161.7	168	1F	20	54	80	85.5	100
42	169.79	184	1F	20	54	80	85.5	100
44	177.87	184	5F	20	54	80	85.5	100
45	181.91	192	5F	20	54	80	85.5	100
48	194.04	200	5F	20	54	90	85.5	100
50	202.13	-	5	20	54	90	85.5	100
52	210.21	-	5	20	54	90	85.5	100
57	230.42	-	5	20	54	90	85.5	100
58	234.47	-	5	20	54	90	85.5	100
60	242.55	-	5	20	70	120	85.5	100
70	282.98	-	5	20	70	120	85.5	100
72	291.06	-	5	20	70	120	85.5	100
76	307.23	-	5	20	70	120	85.5	100
84	339.57	-	5	20	70	120	85.5	100
96	388.08	-	5	24	70	120	85.5	100
120	485.1	-	5	24	70	120	85.5	100
156	630.63	-	5	24	70	130	85.5	100


TYPE 1F




TYPE 5F




TYPE 5




TYPE 3F



TYPE 9F




TYPE 9



L 3/8" (9,525mm)

KONİK BURÇLU / With Taper Bush

L050	Kayış Geniřlięi 12,7 mm For Belt Widths 12,7 mm										
Dİř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	54.57	60	3F	1108	10	28	45	19.1	-	22	3
19	57.61	63	3F	1108	10	28	45	19.1	-	22	3
20	60.64	66	3F	1108	10	28	47	19.1	-	22	3
21	63.67	69	3F	1108	10	28	49	19.1	-	22	3
22	66.7	72	3F	1108	10	28	53	19.1	-	22	3
23	69.73	78	3F	1108	10	28	54	19.1	-	22	3
24	72.77	78	3F	1108	10	28	54	19.1	-	22	3
25	75.8	85	3F	1108	10	28	56	19.1	-	22	3
26	78.83	85	3F	1108	10	28	60	19.1	-	22	3
27	81.86	91	3F	1108	10	28	62	19.1	-	22	3
28	84.89	91	3F	1108	10	28	63	19.1	-	22	3
30	90.96	97	3F	1108	10	28	70	19.1	-	22	3
32	97.02	103	3F	1108	10	28	74	19.1	-	22	3
36	109.15	115	3F	1108	10	28	85	19.1	-	22	3
40	121.28	127	3F	1610	13	42	90	19.1	-	25	6
42	127.34	139	3F	1610	13	42	90	19.1	-	25	6
44	133.4	139	3F	1610	13	42	92	19.1	-	25	6
48	145.53	152	9F	1610	13	42	92	19.1	-	25	3
60	191.91	-	9	1610	13	42	92	19.1	3	25	3
72	218.3	-	9	1610	13	42	92	19.1	3	25	3
84	254.68	-	9	1610	13	42	92	19.1	3	25	3
96	291.06	-	9	2012	19	50	111	19.1	6.5	32	6.5
120	363.83	-	9	2012	19	50	111	19.1	6.5	32	6.5

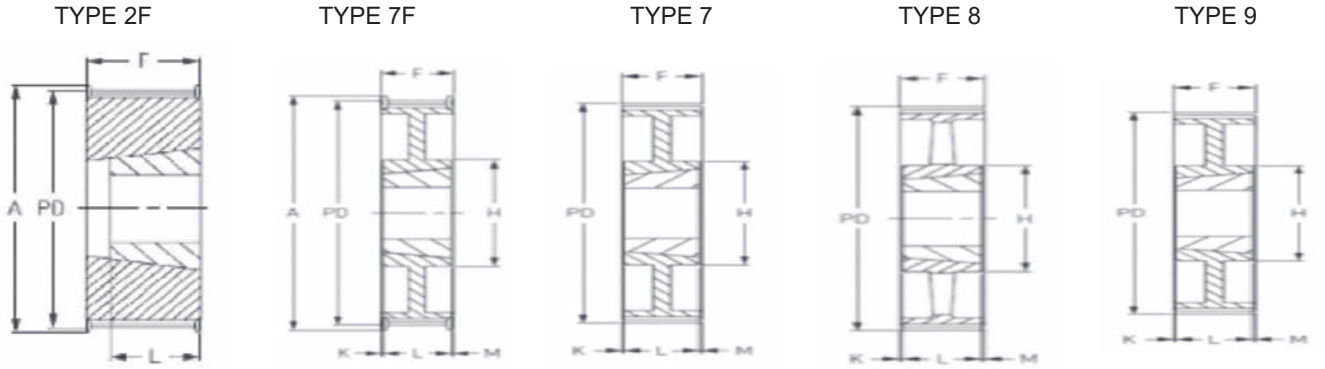


L 3/8" (9,525mm)


KONİK BURÇLU / With Taper Bush

L075	Kayış Geniřlięi 19,1 mm For Belt Widths 19,1 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	54.57	60	2F	1108	10	28	-	25.4	-	25.4	-
19	57.61	63	2F	1108	10	28	-	25.4	-	25.4	-
20	60.64	66	2F	1108	10	28	-	25.4	-	25.4	-
21	63.67	69	2F	1108	10	28	-	25.4	-	25.4	-
22	66.7	72	2F	1108	10	28	-	25.4	-	25.4	-
23	69.73	78	2F	1108	10	28	-	25.4	-	25.4	-
24	72.77	78	2F	1108	10	28	-	25.4	-	25.4	-
25	75.8	85	2F	1108	10	28	-	25.4	-	25.4	-
26	78.83	85	2F	1108	10	28	-	25.4	-	25.4	-
27	81.86	91	2F	1108	10	28	-	25.4	-	25.4	-
28	84.89	91	2F	1108	10	28	-	25.4	-	25.4	-
30	90.96	97	2F	1108	10	28	-	25.4	-	25.4	-
32	97.02	103	2F	1108	10	28	-	25.4	-	25.4	-
36	109.15	115	2F	1610	13	42	-	25.4	-	25.4	-
40	121.28	127	2F	1610	13	42	-	25.4	-	25.4	-
42	127.34	139	2F	1610	13	42	-	25.4	-	25.4	-
44	133.4	139	2F	1610	13	42	-	25.4	-	25.4	-
48	145.53	152	7F	1610	13	42	92	25.4	-	25	-
60	191.91	-	7	1610	13	42	92	25.4	-	25	-
72	218.3	-	8	1610	13	42	92	25.4	-	25	-
84	254.68	-	9	2012	19	50	111	25.4	3.5	32	3.5
96	291.06	-	9	2012	19	50	111	25.4	3.5	32	3.5
120	363.83	-	9	2012	19	50	111	25.4	3.5	32	3.5


TYPE 2F




TYPE 7F




TYPE 7



TYPE 8



TYPE 9




L 3/8" (9,525mm)


KONİK BURÇLU / With Taper Bush

L100	Kayış Geniřlięi 25,4 mm For Belt Widths 25,4 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	54.57	60	2F	1108	10	28	-	25.4	-	25.4	-
19	57.61	63	2F	1108	10	28	-	25.4	-	25.4	-
20	60.64	66	2F	1108	10	28	-	25.4	-	25.4	-
21	63.67	69	2F	1108	10	28	-	25.4	-	25.4	-
22	66.7	72	2F	1108	10	28	-	25.4	-	25.4	-
23	69.73	78	2F	1108	10	28	-	25.4	-	25.4	-
24	72.77	78	2F	1108	10	28	-	25.4	-	25.4	-
25	75.8	85	2F	1108	10	28	-	25.4	-	25.4	-
26	78.83	85	2F	1108	10	28	-	25.4	-	25.4	-
27	81.86	91	2F	1108	10	28	-	25.4	-	25.4	-
28	84.89	91	2F	1108	10	28	-	25.4	-	25.4	-
30	90.96	97	2F	1108	10	28	-	25.4	-	25.4	-
32	97.02	103	2F	1108	10	28	-	25.4	-	25.4	-
36	109.15	115	2F	1610	13	42	-	25.4	-	25.4	-
40	121.28	127	2F	1610	13	42	-	25.4	-	25.4	-
42	127.34	139	2F	1610	13	42	-	25.4	-	25.4	-
44	133.4	139	2F	1610	13	42	-	25.4	-	25.4	-
48	145.53	152	7F	1610	13	42	92	25.4	-	25	-
60	191.91	-	7	1610	13	42	92	25.4	-	25	-
72	218.3	-	8	1610	13	42	92	25.4	-	25	-
84	254.68	-	9	2012	19	50	111	25.4	3.5	32	3.5
96	291.06	-	9	2012	19	50	111	25.4	3.5	32	3.5
120	363.83	-	9	2012	19	50	111	25.4	3.5	32	3.5


TYPE 2F




TYPE 14F



TYPE 9F



TYPE 9




H 1/2" (12,7mm)


KONİK BURÇLU / With Taper Bush

H075	Kayış Geniřlięi 19,1 mm For Belt Widths 19,1 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
14	56.6	63	2F	1108	10	28	-	27	-	22	-
15	60.64	67	2F	1108	10	28	-	27	-	22	-
16	64.68	71	2F	1108	10	28	-	27	-	22	-
17	68.72	75	2F	1108	10	28	-	27	-	22	-
18	72.77	79	2F	1210	11	32	-	27	-	25	-
19	76.81	83	2F	1210	11	32	-	27	-	25	-
20	80.85	87	2F	1210	11	32	-	27	-	25	-
21	84.89	91	2F	1210	11	32	-	27	-	25	-
22	88.94	95	2F	1210	11	32	-	27	-	25	-
23	92.98	98	2F	1610	13	42	-	27	-	25	-
24	97.02	103	2F	1610	13	42	-	27	-	25	-
25	101.06	107	2F	1610	13	42	-	27	-	25	-
26	105.11	111	2F	1610	13	42	-	27	-	25	-
27	109.15	115	2F	1610	13	42	-	27	-	25	-
28	113.19	119	2F	1610	13	42	-	27	-	25	-
29	117.23	123	2F	1610	13	42	-	27	-	25	-
30	121.28	127	2F	1610	13	42	-	27	-	25	-
32	129.36	135	14F	1610	13	42	92	27	-	25	-
33	133.4	142	14F	1610	13	42	92	27	-	25	-
34	137.45	142	14F	1610	13	42	92	27	-	25	-
35	141.49	151	14F	1610	13	42	92	27	-	25	-
36	145.53	151	14F	1610	13	42	92	27	-	25	-
38	153.62	158	14F	1610	13	42	92	27	-	25	-
40	161.7	168	14F	1610	13	42	92	27	-	25	-
44	177.87	184	9F	2012	14	50	106	27	2.5	32	2.5
48	194.04	200	9F	2012	14	50	106	27	2.5	32	2.5
60	242.55	-	9	2012	14	50	106	27	2.5	32	2.5
72	291.06	-	9	2012	14	50	112	27	2.5	32	2.5
84	339.57	-	9	2012	14	50	112	27	2.5	32	2.5
96	388.08	-	9	2517	16	60	125	27	9	45	9
120	485.1	-	9	2517	16	60	125	27	9	45	9


TYPE 4F




TYPE 13F




TYPE 14F



TYPE 8



TYPE 9




H 1/2" (12,7mm)


KONİK BURÇLU / With Taper Bush

H100	Kayış Geniřlięi 25,4 mm For Belt Widths 25,4 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
14	56.6	63	4F	1108	10	28	-	31	9	22	-
15	60.64	67	4F	1108	10	28	-	31	9	22	-
16	64.68	71	4F	1108	10	28	-	31	9	22	-
17	68.72	75	4F	1108	10	28	-	31	9	22	-
18	72.77	79	4F	1210	11	32	-	31	6	25	-
19	76.81	83	4F	1210	11	32	-	31	6	25	-
20	80.85	87	4F	1210	11	32	-	31	6	25	-
21	84.89	91	4F	1210	11	32	-	31	6	25	-
22	88.94	95	4F	1210	11	32	-	31	6	25	-
23	92.98	98	4F	1610	13	42	-	31	6	25	-
24	97.02	103	4F	1610	13	42	-	31	6	25	-
25	101.06	107	4F	1610	13	42	-	31	6	25	-
26	105.11	111	4F	1610	13	42	-	31	6	25	-
27	109.15	115	4F	1610	13	42	-	31	6	25	-
28	113.19	119	4F	1610	13	42	-	31	6	25	-
29	117.23	123	4F	1610	13	42	-	31	6	25	-
30	121.28	127	4F	1610	13	42	-	31	6	25	-
32	129.36	135	13F	1610	13	42	-	31	6	25	-
36	145.53	151	13F	1610	13	42	92	31	6	25	-
40	161.7	168	13F	1610	13	42	92	31	6	25	-
44	177.87	184	14F	2012	14	50	92	31	1	32	-
48	194.04	200	14F	2012	14	50	106	31	1	32	-
60	242.55	-	8	2012	14	50	106	31	1	32	1
72	291.06	-	8	2012	14	50	112	31	1	32	1
84	339.57	-	8	2012	14	50	112	31	1	32	1
96	388.08	-	9	2517	16	60	125	31	7	45	7


TYPE 4F




TYPE 13F



TYPE 14F




TYPE 8



H 1/2" (12,7mm)

KONİK BURÇLU / With Taper Bush


H150	Kayış Geniřlięi 38,1 mm For Belt Widths 38,1 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
14	56.6	63	4F	1108	10	28	-	45	23	22	-
15	60.64	67	4F	1108	10	28	-	45	23	22	-
16	64.68	71	4F	1210	10	28	-	45	20	25	-
17	68.72	75	4F	1210	10	28	-	45	20	25	-
18	72.77	79	4F	1210	11	32	-	45	20	25	-
19	76.81	83	4F	1210	11	32	-	45	20	25	-
20	80.85	87	4F	1210	11	32	-	45	20	25	-
21	84.89	91	4F	1210	11	32	-	45	20	25	-
22	88.94	95	4F	1210	11	32	-	45	20	25	-
23	92.98	98	4F	1610	13	42	-	45	20	25	-
24	97.02	103	4F	1610	13	42	-	45	20	25	-
25	101.06	107	4F	1610	13	42	-	45	20	25	-
26	105.11	111	4F	1610	13	42	-	45	20	25	-
27	109.15	115	4F	1610	13	42	-	45	20	25	-
28	113.19	119	4F	1610	13	42	-	45	20	25	-
29	117.23	123	4F	1610	13	42	-	45	20	25	-
30	121.28	127	4F	1610	13	42	-	45	20	25	-
32	129.36	135	13F	1610	13	42	92	45	20	25	-
36	145.53	151	13F	1610	13	42	92	45	20	25	-
40	161.7	168	13F	1610	13	42	92	45	20	25	-
44	177.87	184	14F	2012	14	50	106	45	13	32	-
48	194.04	200	14F	2012	14	50	106	45	13	32	-
60	242.55	-	8	2012	14	50	106	45	6.5	32	6.5
72	291.06	-	8	2012	14	50	112	45	6.5	32	6.5
84	339.57	-	8	2012	14	50	112	45	6.5	32	6.5
96	388.08	-	8	2517	16	60	125	45	0.5	45	0.5
120	485.1	-	8	2517	16	60	125	45	-	45	-

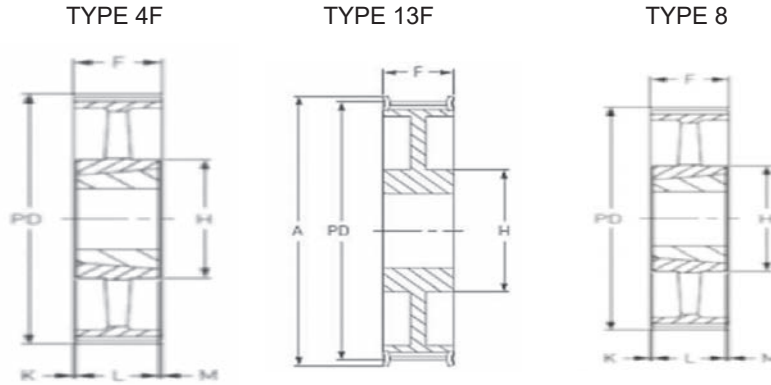

H 1/2" (12,7mm)

KONİK BURÇLU / With Taper Bush

H200	Kayış Geniřlięi 50,8 mm For Belt Widths 50,8 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
16	64.68	71	4F	1108	10	28	-	58	36	22	-
17	68.72	75	4F	1210	10	28	-	58	33	25	-
18	72.77	79	4F	1210	11	32	-	58	33	25	-
19	76.81	83	4F	1610	11	32	-	58	33	25	-
20	80.85	87	4F	1610	11	32	-	58	33	25	-
21	84.89	91	4F	1610	11	32	-	58	33	25	-
22	88.94	95	4F	1610	11	32	-	58	33	25	-
23	92.98	98	4F	1610	13	42	-	58	33	25	-
24	97.02	103	4F	1610	13	42	-	58	33	25	-
25	101.06	107	4F	1610	13	42	-	58	33	25	-
26	105.11	111	4F	1610	13	42	-	58	33	25	-
27	109.15	115	4F	1610	13	42	-	58	33	25	-
28	113.19	119	4F	1610	13	42	-	58	33	25	-
29	117.23	123	4F	1610	13	42	-	58	33	25	-
30	121.28	127	4F	1610	13	42	-	58	33	25	-
32	129.36	135	4F	2012	13	42	-	58	26	32	-
36	145.53	151	13F	2012	13	42	106	58	26	32	-
40	161.7	168	13F	2012	13	42	106	58	26	32	-
44	177.87	184	13F	2012	14	50	106	58	26	32	-
48	194.04	200	13F	2517	14	50	125	58	13	45	-
60	242.55	-	8	2517	14	50	125	60	7.5	45	7.5
72	291.06	-	8	2517	14	50	125	60	7.5	45	7.5
84	339.57	-	8	2517	14	50	125	60	7.5	45	7.5
96	388.08	-	8	2517	16	60	125	60	7.5	45	7.5
120	485.1	-	8	2517	16	60	125	60	7.5	45	7.5

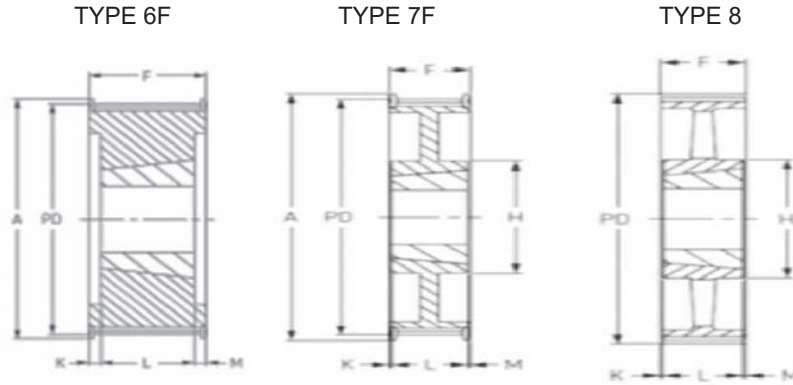

H 1/2" (12,7mm)

KONİK BURÇLU / With Taper Bush

H300	Kayış Geniřlięi 76,2 mm For Belt Widths 76,2 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	72.77	79	6F	1215	11	32	-	84	23	38	23
19	76.81	83	6F	1615	13	42	-	84	23	38	23
20	80.85	87	6F	1615	13	42	-	84	23	38	23
21	84.89	91	6F	1615	13	42	-	84	23	38	23
22	88.94	95	6F	1615	13	42	-	84	23	38	23
23	92.98	98	6F	1615	13	42	-	84	23	38	23
24	97.02	103	6F	1615	13	42	-	84	23	38	23
25	101.06	107	6F	1615	13	42	-	84	23	38	23
26	105.11	111	6F	1615	13	42	-	84	23	38	23
27	109.15	115	6F	2012	14	50	-	84	26	32	26
28	113.19	119	6F	2012	14	50	-	84	26	32	26
29	117.23	123	6F	2012	14	50	-	84	26	32	26
30	121.28	127	6F	2517	14	50	-	84	19.5	45	19.5
32	129.36	135	6F	2517	16	60	-	84	19.5	45	19.5
36	145.53	151	6F	2517	16	60	-	84	19.5	45	19.5
40	161.7	168	6F	2517	16	60	-	84	19.5	45	19.5
44	177.87	184	7F	2517	16	60	120	86	20.5	45	20.5
48	194.04	200	7F	2517	16	60	120	86	20.5	45	20.5
60	242.55	-	8	2517	16	60	120	86	20.5	45	20.5
72	291.06	-	8	2517	16	60	120	86	20.5	45	20.5
84	339.57	-	8	2517	16	60	120	86	20.5	45	20.5
96	388.08	-	8	3030	32	75	170	86	5	76	5
120	485.1	-	8	3030	32	75	170	86	5	76	5

XH 7/8" (22,225mm)


KONİK BURÇLU / With Taper Bush

XH200	Kayış Geniřlięi 50,8 mm For Belt Widths 50,8 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	127.34	141	6F	2012	14	50	-	65.1	-	32	-
19	134.41	156	6F	2012	14	50	-	65.1	-	32	-
20	141.49	155	6F	2012	14	50	-	65.1	-	32	-
21	148.56	169	6F	2517	16	60	-	65.1	-	45	-
22	155.64	169	6F	2517	16	60	-	65.1	-	45	-
24	169.79	183	6F	2517	16	60	-	65.1	-	45	-
25	176.86	198	6F	2517	16	60	-	65.1	-	45	-
26	183.93	198	6F	2517	16	60	-	65.1	-	45	-
27	191.01	212	7F	2517	16	60	120	65.1	10	45	10
28	198.09	212	7F	2517	16	60	120	65.1	10	45	10
30	212.23	226	7F	2517	16	60	120	65.1	10	45	10
32	226.38	240	7F	2517	16	60	120	65.1	10	45	10
36	254.64	267	8	2517	16	60	120	65.1	10	45	10
40	282.98	-	8	3020	25	75	170	65.1	7	51	7
48	339.57	-	8	3020	25	75	170	65.1	7	51	7
60	424.47	-	8	3020	25	75	170	65.1	7	51	7


TYPE 6F



TYPE 7F



TYPE 8




XH 7/8" (22,225mm)


KONİK BURÇLU / With Taper Bush

XH300	Kayış Geniřlięi 76,2 mm For Belt Widths 76,2 mm										
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	BURÇ Bush	DELİK Bore		BOYUTLAR Dimension				
	P.D	A			Min.	Max.	H	F	K	L	M
	mm	mm			mm	mm	mm	mm	mm	mm	mm
18	127.34	141	6F	2012	14	50	-	92.1	-	32	-
19	134.41	156	6F	2517	16	60	-	92.1	-	45	-
20	141.49	155	6F	2517	16	60	-	92.1	-	45	-
21	148.56	169	6F	2517	16	60	-	92.1	-	45	-
22	155.64	169	6F	2517	16	60	-	92.1	-	45	-
24	169.79	183	6F	2517	16	60	-	92.1	-	45	-
25	176.86	198	6F	2517	16	60	-	92.1	-	45	-
26	183.93	198	6F	2517	16	60	-	92.1	-	45	-
27	191.01	212	6F	2517	16	60	-	92.1	-	45	-
28	198.09	212	7F	2517	16	60	120	92.1	23.5	45	23.5
30	212.23	226	7F	2517	16	60	120	92.1	23.5	45	23.5
32	226.38	240	7F	3020	25	75	170	92.1	20.5	51	20.5
36	254.64	267	7F	3020	25	75	170	92.1	20.5	51	20.5
40	282.98	-	8	3020	25	75	170	92.1	20.5	51	20.5
48	339.57	-	8	3020	25	75	170	92.1	20.5	51	20.5
60	424.47	-	8	3020	25	75	170	92.1	20.5	51	20.5


TYPE 6F







TYPE 7F



TYPE 8



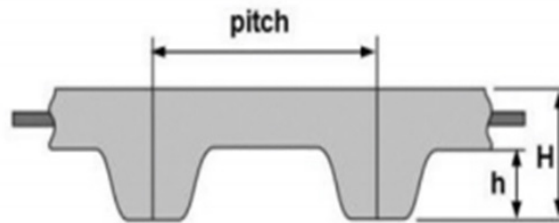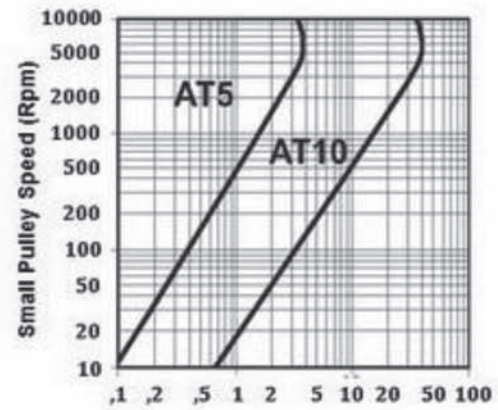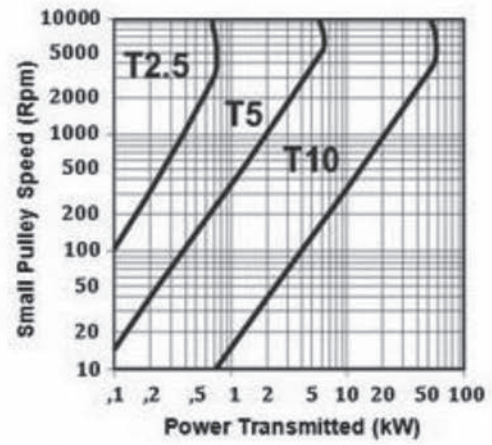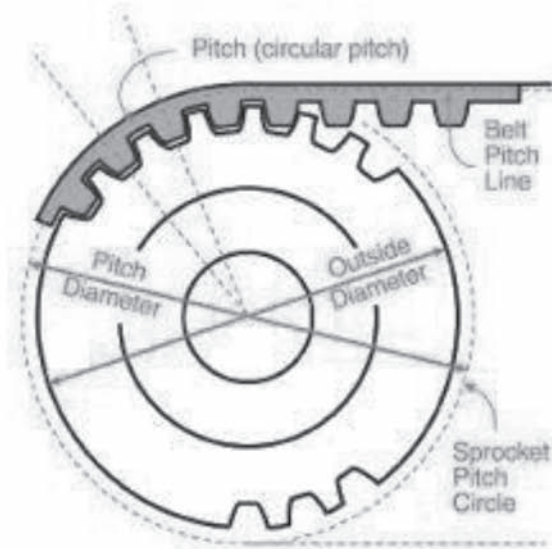


TİP Type	ADIM(P) Pitch mm	h	H	a°
T 2,5	2.5	0.7	1.3	40
T 5	5	1.2	2.2	40
T 10	10	2.5	4.5	40
AT 5	5	1.2	2.5	50
AT 10	10	2.7	4.5	50


T2,5-AT2,5
PİLOT DELİKLİ / Pilot Bore

T2,5-AT2,5		Kayış Geniřlięi 4-6 mm For Belt Widths 4-6 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	7.96	10	0F	-	3	10	10	16
11	8.75	12	0F	-	3	11	10	16
12	9.54	13	0F	-	4	13	10	16
13	10.35	14	0F	-	4	14	10	16
14	11.14	15	0F	-	5	15	10	16
15	11.94	15	0F	-	6	15	10	16
16	12.73	16	0F	-	7	16	10	16
17	13.53	17	0F	4	7	16	10	16
18	14.32	18	1F	4	7	10	10	16
19	15.12	18	1F	4	7	10	10	16
20	15.92	20	1F	4	7	11	10	16
21	16.71	20	1F	4	7	11	10	16
22	17.51	23	1F	4	7	10	10	16
23	18.3	23	1F	4	8	12	10	16
24	19.1	23	1F	4	8	12	10	16
25	19.89	25	1F	4	9	13	10	16
26	20.69	25	1F	4	9	14	10	16
27	21.49	25	1F	4	9	14	10	16
28	22.28	28	1F	4	9	14	10	16
30	23.87	32	1F	6	10	16	10	16
32	25.46	36	1F	6	10	16	10	16
35	27.85	36	1F	6	10	18	10	16
36	28.65	38	1F	6	13	20	10	16
38	30.24	38	1F	6	13	22	10	16
40	31.83	42	1F	6	13	22	10	16
42	33.42	-	1	6	15	24	10	16
44	35.01	-	1	6	15	24	10	16
45	35.81	-	1	6	17	26	10	16
48	38.2	-	1	6	17	26	10	16
54	42.97	-	1	6	19	30	10	16
57	45.36	-	1	8	19	32	10	16
60	47.75	-	1	8	22	34	10	16


TYPE 0F



TYPE 1F




TYPE 1




T2,5-AT2,5
PİLOT DELİKLİ / Pilot Bore

T2,5-AT2,5			Kayış Geniřlięi 10 mm For Belt Widths 10 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	7.96	10	0F	3	3	10	14	20
11	8.75	12	0F	3	3	11	14	20
12	9.54	13	0F	3	4	13	14	20
13	10.35	14	0F	3	4	14	14	20
14	11.14	15	0F	3	5	15	14	20
15	11.94	15	0F	3	6	15	14	20
16	12.73	16	0F	4	7	16	14	20
17	13.53	17	1F	4	7	16	14	20
18	14.32	18	1F	4	7	10	14	20
19	15.12	18	1F	4	7	10	14	20
20	15.92	20	1F	4	7	11	14	20
21	16.71	20	1F	4	7	11	14	20
22	17.51	23	1F	4	7	10	14	20
23	18.3	23	1F	4	8	12	14	20
24	19.1	23	1F	4	8	12	14	20
25	19.89	25	1F	4	9	13	14	20
26	20.69	25	1F	4	9	14	14	20
27	21.49	25	1F	4	9	14	14	20
28	22.28	28	1F	4	9	14	14	20
30	23.87	32	1F	6	10	16	14	20
32	25.46	36	1F	6	10	16	14	20
35	27.85	36	1F	6	10	18	14	20
36	28.65	38	1F	6	13	20	14	20
38	30.24	38	1F	6	13	22	14	20
40	31.83	42	1F	6	13	22	14	20
42	33.42	-	1	6	15	24	14	20
44	35.01	-	1	6	15	24	14	20
45	35.81	-	1	6	17	26	14	20
48	38.2	-	1	6	17	26	14	20
54	42.97	-	1	6	19	30	14	20
57	45.36	-	1	8	19	32	14	20
60	47.75	-	1	8	22	34	14	20


TYPE 0F



TYPE 1F



TYPE 1




T5-AT5


PİLOT DELİKLİ / Pilot Bore

T5-AT5		Kayış Genişliği 10 mm For Belt Widths 10 mm						
Diş SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	15.92	20	1F	4	5	8	15	21
11	17.51	22	1F	4	6	10	15	21
12	19.1	23	1F	4	7	12	15	21
13	20.69	25	1F	6	8	13	15	21
14	22.29	26	1F	6	9	14	15	21
15	23.88	28	1F	6	10	16	15	21
16	25.47	30	1F	6	11	18	15	21
17	27.06	32	1F	6	12	19	15	21
18	28.65	32	1F	6	13	20	15	21
19	30.25	36	1F	6	14	22	15	21
20	31.83	36	1F	6	15	24	15	21
21	33.42	38	1F	6	15	24	15	21
22	35.01	38	1F	6	15	24	15	21
23	36.61	42	1F	6	16	25	15	21
24	38.21	44	1F	6	17	26	15	21
25	39.8	44	1F	6	17	26	15	21
26	41.45	44	1F	6	17	26	15	21
27	42.98	48	1F	6	19	30	15	21
28	44.56	48	1F	8	20	32	15	21
30	47.76	51	1F	8	22	34	15	21
32	50.94	54	1F	8	24	38	15	21
35	55.7	59	1F	8	24	38	15	21
36	57.31	63	1F	8	24	38	15	21
38	60.48	66	1F	8	26	40	15	21
40	63.66	66	1F	8	26	40	15	21
42	66.84	71	1	8	26	40	15	21
44	70.2	-	1	8	29	45	15	21
45	71.62	-	1	8	31	45	15	21
48	76.69	-	1	8	32	50	15	21
54	85.94	-	1	8	35	55	15	21
57	90.72	-	1	8	38	60	15	21
60	95.49	-	1	8	42	65	15	21

TYPE 1F



TYPE 1




T5-AT5


PİLOT DELİKLİ / Pilot Bore

T5-AT5		Kayış Geniřlięi 16 mm For Belt Widths 16 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	15.92	20	1F	4	5	8	21	27
11	17.51	22	1F	4	6	10	21	27
12	19.1	23	1F	4	7	12	21	27
13	20.69	25	1F	6	8	13	21	27
14	22.29	26	1F	6	9	14	21	27
15	23.88	28	1F	6	10	16	21	27
16	25.47	30	1F	6	11	18	21	27
17	27.06	32	1F	6	12	19	21	27
18	28.65	32	1F	6	13	20	21	27
19	30.25	36	1F	6	14	22	21	27
20	31.83	36	1F	6	15	24	21	27
21	33.42	38	1F	6	15	24	21	27
22	35.01	38	1F	6	15	24	21	27
23	36.61	42	1F	6	16	25	21	27
24	38.21	44	1F	6	17	26	21	27
25	39.8	44	1F	6	17	26	21	27
26	41.45	44	1F	6	17	26	21	27
27	42.98	48	1F	6	19	30	21	27
28	44.56	48	1F	8	20	32	21	27
30	47.76	51	1F	8	22	34	21	27
32	50.94	54	1F	8	24	38	21	27
35	55.7	59	1F	8	24	38	21	27
36	57.31	63	1F	8	24	38	21	27
38	60.48	66	1F	8	26	40	21	27
40	63.66	66	1F	8	26	40	21	27
42	66.84	71	1	8	26	40	21	27
44	70.2	-	1	8	29	45	21	27
45	71.62	-	1	8	31	45	21	27
48	76.69	-	1	8	32	50	21	27
54	85.94	-	1	8	35	55	21	27
57	90.72	-	1	8	38	60	21	27
60	95.49	-	1	8	42	65	21	27

TYPE 1F



TYPE 1




T5-AT5


PİLOT DELİKLİ / Pilot Bore

T5-AT5		Kayış Genişliği 10 mm For Belt Widths 10 mm						
Diş SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	15.92	20	1F	4	5	8	21	27
11	17.51	22	1F	4	6	10	21	27
12	19.1	23	1F	4	7	12	21	27
13	20.69	25	1F	6	8	13	21	27
14	22.29	26	1F	6	9	14	21	27
15	23.88	28	1F	6	10	16	21	27
16	25.47	30	1F	6	11	18	21	27
17	27.06	32	1F	6	12	19	21	27
18	28.65	32	1F	6	13	20	21	27
19	30.25	36	1F	6	14	22	21	27
20	31.83	36	1F	6	15	24	21	27
21	33.42	38	1F	6	15	24	21	27
22	35.01	38	1F	6	15	24	21	27
23	36.61	42	1F	6	16	25	21	27
24	38.21	44	1F	6	17	26	21	27
25	39.8	44	1F	6	17	26	21	27
26	41.45	44	1F	6	17	26	21	27
27	42.98	48	1F	6	19	30	21	27
28	44.56	48	1F	8	20	32	21	27
30	47.76	51	1F	8	22	34	21	27
32	50.94	54	1F	8	24	38	21	27
35	55.7	59	1F	8	24	38	21	27
36	57.31	63	1F	8	24	38	21	27
38	60.48	66	1F	8	26	40	21	27
40	63.66	66	1F	8	26	40	21	27
42	66.84	71	1	8	26	40	21	27
44	70.2	-	1	8	29	45	21	27
45	71.62	-	1	8	31	45	21	27
48	76.69	-	1	8	32	50	21	27
54	85.94	-	1	8	35	55	21	27
57	90.72	-	1	8	38	60	21	27
60	95.49	-	1	8	42	65	21	27

TYPE 1F



TYPE 1




T5-AT5


PİLOT DELİKLİ / Pilot Bore

T5-AT5		Kayış Geniřlięi 16 mm For Belt Widths 16 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
10	15.92	20	1F	4	5	8	30	36
11	17.51	22	1F	4	6	10	30	36
12	19.1	23	1F	4	7	12	30	36
13	20.69	25	1F	6	8	13	30	36
14	22.29	26	1F	6	9	14	30	36
15	23.88	28	1F	6	10	16	30	36
16	25.47	30	1F	6	11	18	30	36
17	27.06	32	1F	6	12	19	30	36
18	28.65	32	1F	6	13	20	30	36
19	30.25	36	1F	6	14	22	30	36
20	31.83	36	1F	6	15	24	30	36
21	33.42	38	1F	6	15	24	30	36
22	35.01	38	1F	6	15	24	30	36
23	36.61	42	1F	6	16	25	30	36
24	38.21	44	1F	6	17	26	30	36
25	39.8	44	1F	6	17	26	30	36
26	41.45	44	1F	6	17	26	30	36
27	42.98	48	1F	6	19	30	30	36
28	44.56	48	1F	8	20	32	30	36
30	47.76	51	1F	8	22	34	30	36
32	50.94	54	1F	8	24	38	30	36
35	55.7	59	1F	8	24	38	30	36
36	57.31	63	1F	8	24	38	30	36
38	60.48	66	1F	8	26	40	30	36
40	63.66	66	1F	8	26	40	30	36
42	66.84	71	1	8	26	40	30	36
44	70.2	-	1	8	29	45	30	36
45	71.62	-	1	8	31	45	30	36
48	76.69	-	1	8	32	50	30	36
54	85.94	-	1	8	35	55	30	36
57	90.72	-	1	8	38	60	30	36
60	95.49	-	1	8	42	65	30	36

TYPE 1F




TYPE 1




T10-AT10
PİLOT DELİKLİ / Pilot Bore

T10-AT10		Kayış Geniřlięi 16 mm For Belt Widths 16 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
12	38.2	42	1F	6	18	27	21	31
13	41.38	44	1F	6	19	32	21	31
14	44.56	48	1F	8	21	32	21	31
15	47.75	51	1F	8	21	32	21	31
16	50.93	54	1F	8	23	35	21	31
17	54.11	58	1F	8	24	38	21	31
18	57.29	60	1F	8	26	40	21	31
19	60.48	66	1F	8	28	44	21	31
20	63.66	66	1F	8	30	46	21	31
21	66.85	71	1F	8	36	48	21	31
22	70.03	75	1F	8	34	52	21	31
23	73.21	77	1F	8	36	55	21	31
24	76.39	83	1F	8	38	58	21	31
25	79.58	83	1F	8	39	60	21	31
26	82.76	87	1F	8	39	60	21	31
27	85.95	91	1F	8	39	60	21	31
28	89.25	93	1F	8	39	60	21	31
30	95.49	99	1F	8	39	60	21	31
32	101.86	106	1F	10	42	65	21	31
35	111.41	115	1F	10	45	70	21	31
36	114.59	119	1F	10	45	70	21	31
38	120.96	125	1F	10	48	75	21	31
40	127.32	131	1F	10	52	80	21	31
42	133.69	-	1	10	52	80	21	31
44	140.06	-	1	10	57	88	21	31
45	143.24	-	1	16	57	90	21	31
48	152.78	-	1	16	62	95	21	31
54	171.89	-	1	16	66	100	21	31
57	181.44	-	1	16	66	110	21	31
60	190.98	-	1	16	72	110	21	31

TYPE 1F



TYPE 1




T10-AT10


PİLOT DELİKLİ / Pilot Bore

T10-AT10		Kayış Genişliği 25 mm For Belt Widths 25 mm						
Diş SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
12	38.2	42	1F	6	18	27	30	40
13	41.38	44	1F	6	19	32	30	40
14	44.56	48	1F	8	21	32	30	40
15	47.75	51	1F	8	21	32	30	40
16	50.93	54	1F	8	23	35	30	40
17	54.11	58	1F	8	24	38	30	40
18	57.29	60	1F	8	26	40	30	40
19	60.48	66	1F	8	28	44	30	40
20	63.66	66	1F	8	30	46	30	40
21	66.85	71	1F	8	36	48	30	40
22	70.03	75	1F	8	34	52	30	40
23	73.21	77	1F	8	36	55	30	40
24	76.39	83	1F	8	38	58	30	40
25	79.58	83	1F	8	39	60	30	40
26	82.76	87	1F	8	39	60	30	40
27	85.95	91	1F	8	39	60	30	40
28	89.25	93	1F	8	39	60	30	40
30	95.49	99	1F	8	39	60	30	40
32	101.86	106	1F	10	42	65	30	40
35	111.41	115	1F	10	45	70	30	40
36	114.59	119	1F	10	45	70	30	40
38	120.96	125	1F	10	48	75	30	40
40	127.32	131	1F	10	52	80	30	40
42	133.69	-	1	10	52	80	30	40
44	140.06	-	1	10	57	88	30	40
45	143.24	-	1	16	57	90	30	40
48	152.78	-	1	16	62	95	30	40
54	171.89	-	1	16	66	100	30	40
57	181.44	-	1	16	66	110	30	40
60	190.98	-	1	16	72	110	30	40

TYPE 1F



TYPE 1




T10-AT10


PİLOT DELİKLİ / Pilot Bore

T10-AT10			Kayış Geniřlięi 32 mm For Belt Widths 32 mm					
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
18	57.29	60	1F	10	26	40	37	47
19	60.48	66	1F	10	28	44	37	47
20	63.66	66	1F	12	30	46	37	47
21	66.85	71	1F	12	36	48	37	47
22	70.03	75	1F	12	34	52	37	47
23	73.21	77	1F	12	36	55	37	47
24	76.39	83	1F	12	38	58	37	47
25	79.58	83	1F	12	39	60	37	47
26	82.76	87	1F	12	39	60	37	47
27	85.95	91	1F	12	39	60	37	47
28	89.25	93	1F	12	39	60	37	47
30	95.49	99	1F	12	39	60	37	47
32	101.86	106	1F	12	42	65	37	47
35	111.41	115	1F	16	45	70	37	47
36	114.59	119	1F	16	45	70	37	47
38	120.96	125	1F	16	48	75	37	47
40	127.32	131	1F	16	52	80	37	47
42	133.69	-	1	16	52	80	37	47
44	140.06	-	1	16	57	88	37	47
45	143.24	-	1	16	57	90	37	47
48	152.78	-	1	16	62	95	37	47
54	171.89	-	1	16	66	100	37	47
57	181.44	-	1	16	66	110	37	47
60	190.98	-	1	16	72	110	37	47

TYPE 1F




TYPE 1



T10-AT10
PİLOT DELİKLİ / Pilot Bore

T10-AT10		Kayış Geniřlięi 50 mm For Belt Widths 50 mm						
Diř SAYISI Teeth No	ÇAP Diameter		TİP Type	DELİK Bore		BOYUTLAR Dimension		
	P.D	A		Min.	Max.	H	F	L
	mm	mm		mm	mm	mm	mm	mm
18	57.29	60	1F	10	26	40	56	66
19	60.48	66	1F	10	28	44	56	66
20	63.66	66	1F	12	30	46	56	66
21	66.85	71	1F	12	36	48	56	66
22	70.03	75	1F	12	34	52	56	66
23	73.21	77	1F	12	36	55	56	66
24	76.39	83	1F	12	38	58	56	66
25	79.58	83	1F	12	39	60	56	66
26	82.76	87	1F	12	39	60	56	66
27	85.95	91	1F	12	39	60	56	66
28	89.25	93	1F	12	39	60	56	66
30	95.49	99	1F	12	39	60	56	66
32	101.86	106	1F	12	42	65	56	66
35	111.41	115	1F	16	45	70	56	66
36	114.59	119	1F	16	45	70	56	66
38	120.96	125	1F	16	48	75	56	66
40	127.32	131	1F	16	52	80	56	66
42	133.69	-	1	16	52	80	56	66
44	140.06	-	1	16	57	88	56	66
45	143.24	-	1	16	57	90	56	66
48	152.78	-	1	16	62	95	56	66
54	171.89	-	1	16	66	100	56	66
57	181.44	-	1	16	66	110	56	66
60	190.98	-	1	16	72	110	56	66

TYPE 1F



TYPE 1

