





WE ADD MOVEMENT
TO YOUR POWER

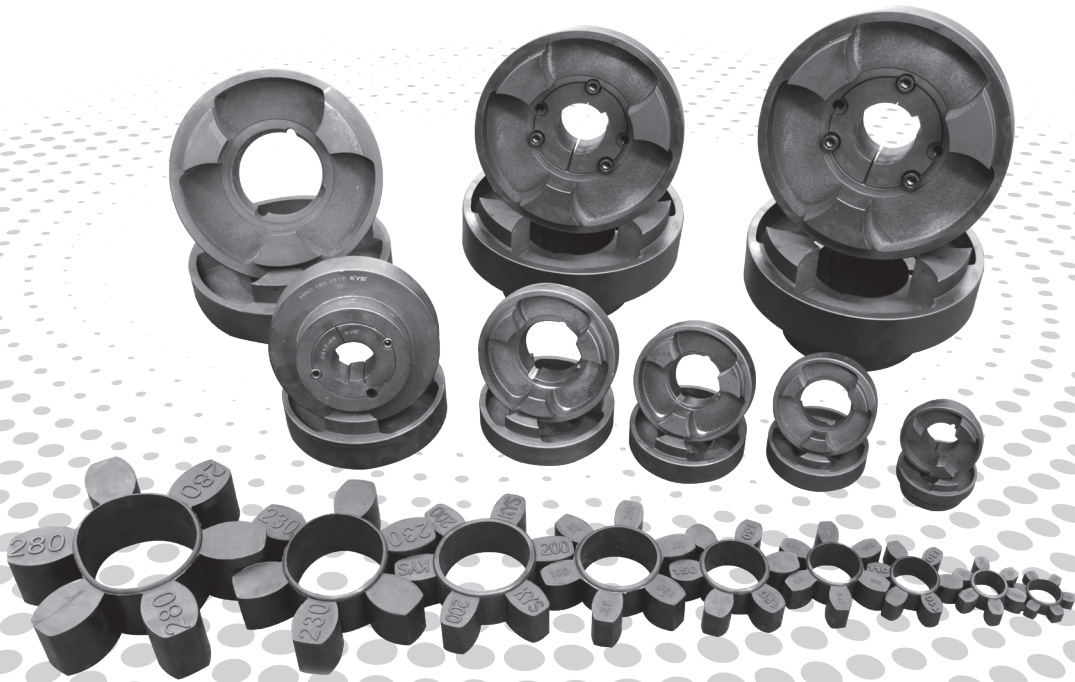

CATALOG
2022



HRC KAPLINLER
HRC COUPLINGS

MOTOR GÜÇLERİ (KW) / POWER (KW)

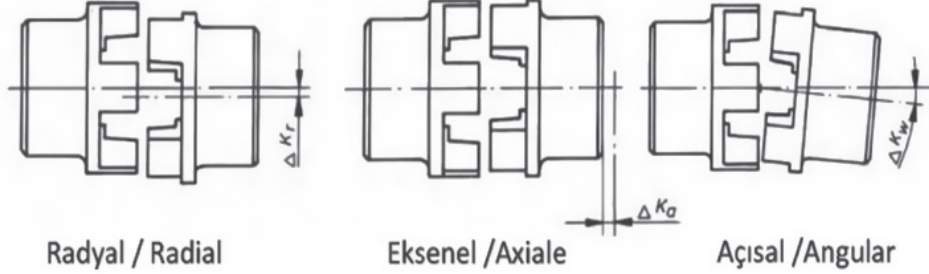

ÖLÇÜ Size	Max. Döndürme Hızı Max. Rotational speed	TORK Torque (NM)		Max. Mil Hizalama Max. Shaft misalignment		
		Max.	Nominal	radyal	eksenel	açısal
70	8300	31	72	0.3	+0.2	1
90	6740	80	180	0.3	+0.5	1
110	5200	160	350	0.3	+0.6	1
130	4100	315	720	0.4	+0.8	1
150	3600	600	1500	0.4	+0.9	1
180	3000	950	2350	0.4	+1.1	1
230	2600	2000	5000	0.5	+1.3	1
280	2200	3150	7200	0.5	+1.7	1



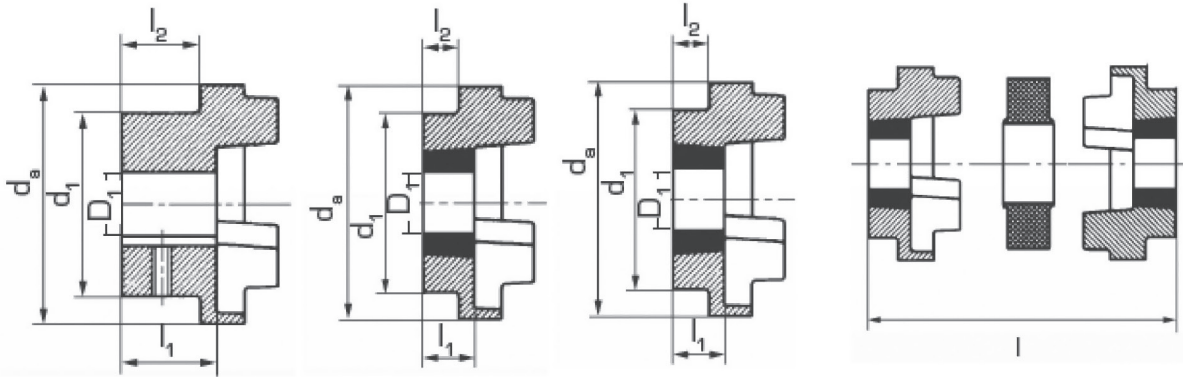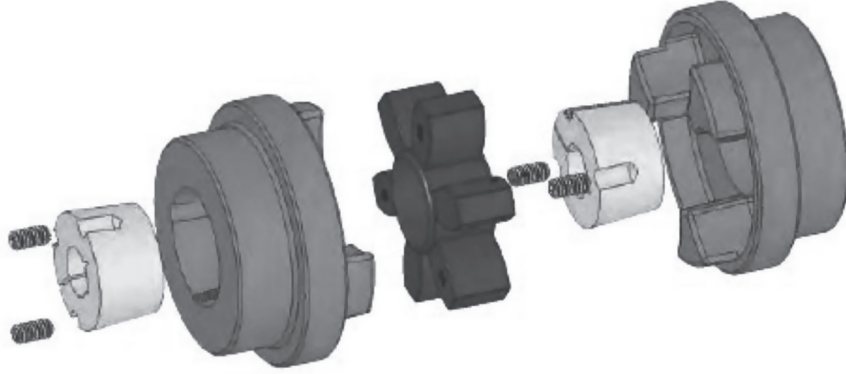

B TİP / B TYPE

F TİP / F TYPE

H TİP / H TYPE

ÖLÇÜ Size	F - H TİP / F- H TYPE							Montaj Uzunluğu / Installation length
	BURÇ Bush	D1		I1	I2	da	d1	I
		min. mm	max. mm	mm	mm	mm	mm	FF,FH,HH mm
70	1008	10	25	22	20	70	60	65
90	1108	10	25	22	19.5	90	70	69.5
110	1610	14	40	25	18.5	110	100	82
130	1610	14	40	25	18	130	105	89
150	2012	14	50	32	23.5	150	115	107
180	2517	16	60	45	34.5	180	125	142
230	3020	25	75	51	39.5	230	150	164.5
280	3535	35	90	89	51	280	170	207.5